
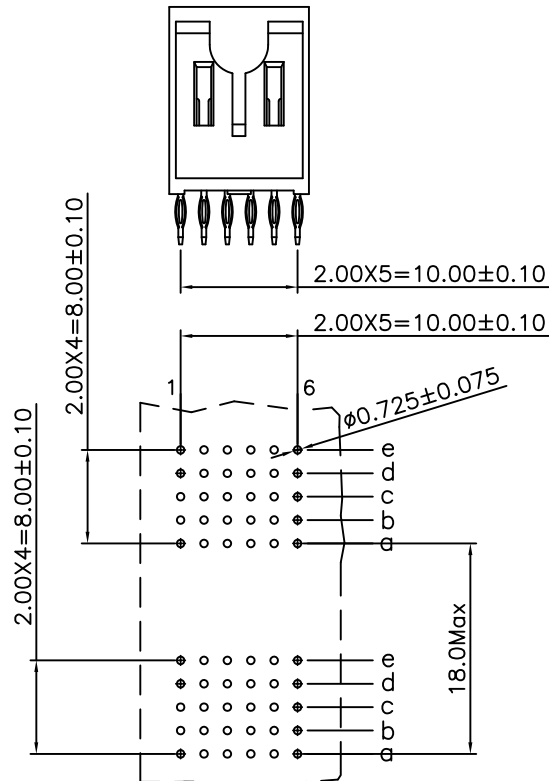
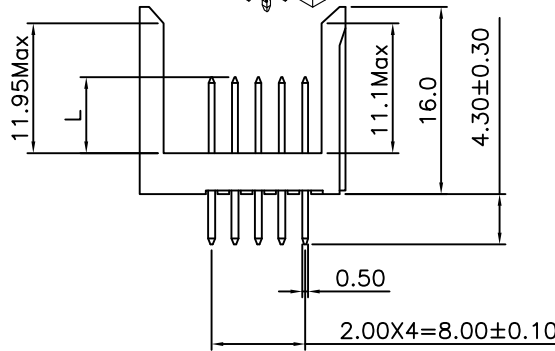



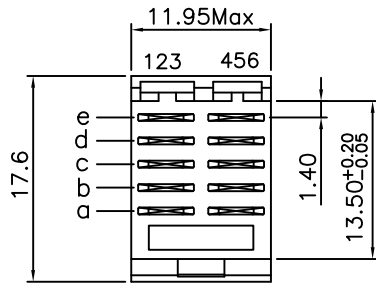

P.C. Board Layout
(Tolerance: ± 0.05)

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 3 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

P/N.	L
FUP-PP0465-5X02	6.50
FUP-PP0472-5X02	7.25
FUP-PP0480-5X02	8.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FUP-PP04xx-5X02-LF
SERIES | | | LEADFREE
10 WAY
65:CONTACT 6.5mm
72:CONTACT 7.25mm
80:CONTACT 8.0mm
DIP 4.2mm
MALE
PRESS FIT

DESCRIPTION: H.D. 2.0mm Futurebus(+) 5 Rows Male Power Press Fit Type