


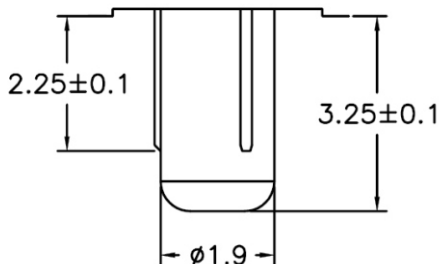
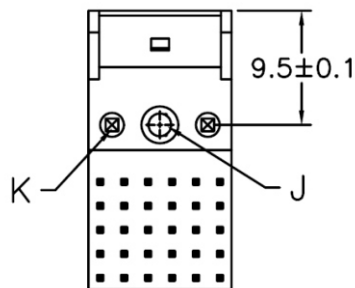


DETAIL: K

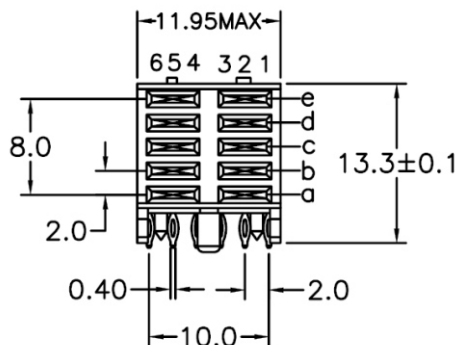

DETAIL: J





FUP-SQxx-5X02-LF

02:2.90mm
03:3.53mm

LEADFREE

NOTES:

- 1.MATERIAL:
 - 1.1.HOUSING: LIQUID CRYSTAL POLYMER(LCP) UL94V-0.
 - 1.2.CONTACTS: PHOSPHOR BRONZE
- 2.SPECIFICATION:
 - 2.1.ELECTRICAL CHARACTERISTIC:
 - 2.1.1.CURRENT RATINGA: 3 AMP.
 - 2.1.2.CONTACT RESISTANCE: 30mΩMAX..
 - 2.1.3.INSULATOR RESISTANCE: 1000MΩMIN.
 - 2.1.4.DIELECTRIC WITHSTANDING VOLTAGE: AC 1000V For 1 MINUTE.
 - 3.EVIRONMENTAL:
 - 3.1.OPERATING TEMPERATURE: -65°C ~+125°C.

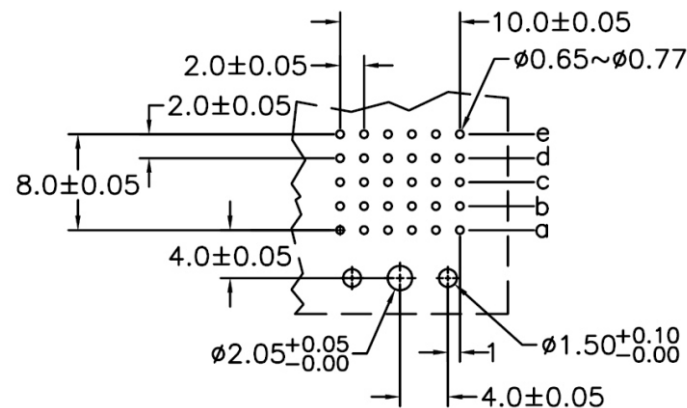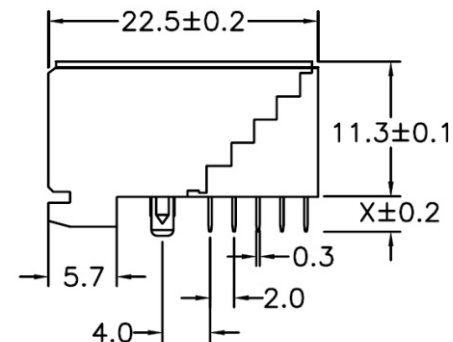

P.C. Board Layout

X	1	2
Length	2.90	3.53

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. FUP-SQxx-5X02

DWG NO. FUP-SQxx-5X02

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2
.XX±0.1
.XXX±
AWG

RoHS Compliant

DESCRIP TION:

AREA

REVISIONS

HK

DATE