


FEATURES:


- . 8 Circuits
- . Housing: Glass Filled LCP, UL 94V-0
- . Contact: Phosphor Bronze
- . Packaging: Tray
- . 8 Circuits modular unit fits into same space and footprint as 24 Circuits signal module
- . Four point contact design
- . Terminal guide plate ensures true positioning of PC tails
- . Post-plated terminals for high reliability
- . Polarizing key posts and guide walls secure code keys and provide proper mating
- . PCB retention pegs

SPECIFICATIONS:


- . Current rating: 3.0A
- . Voltage rating: 1000V
- . Temperature range: -55°C ~+ 125°C
- . Contact resistance: 10mΩ max.
- . Insulation resistance: 5000mΩ min.
- . Dielectric withstanding voltage: 750V AC

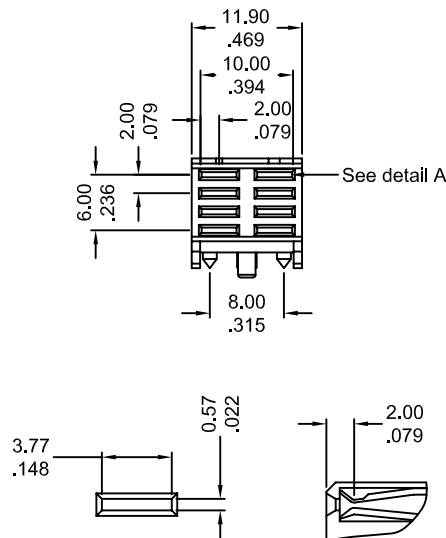


Detail A
(Scale 2:1)

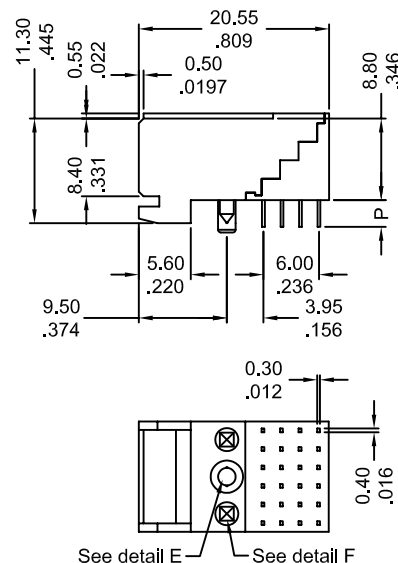


See detail E See detail F

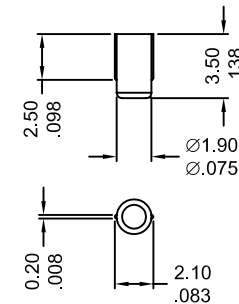

Detail E
(Scale 2:1)

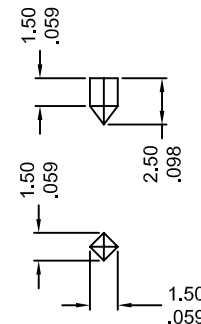

Detail F
(Scale 2:1)

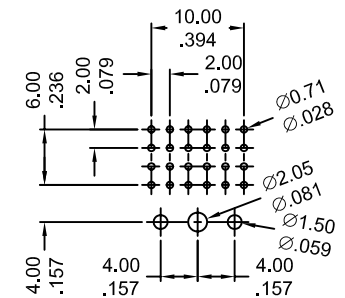

Recommended P.C Board
Hole Layout

Thickness: $\frac{1.60}{.063}$ & $\frac{2.40}{.094}$

UNIT: MM
INCH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FUP-SRxx-4X02-LF
SERIES LEADFREE
8 WAY
FEMALE 02:DIP 2.9mm
03:DIP 3.53mm
DIP 90°

DESCRIPTION: .079" (2.00mm) Pitch Female Power (Futurebus) Header