
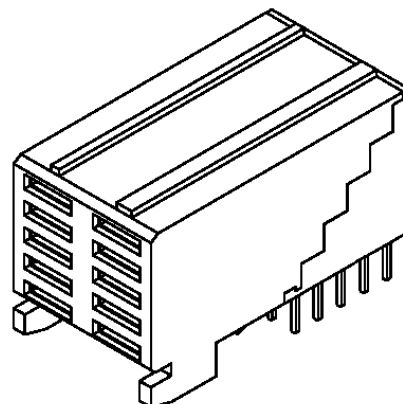
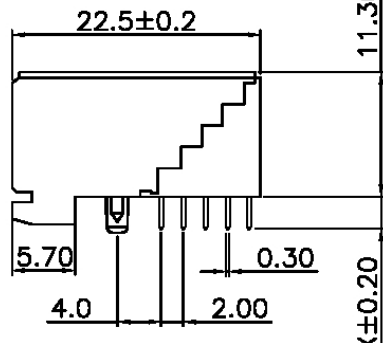
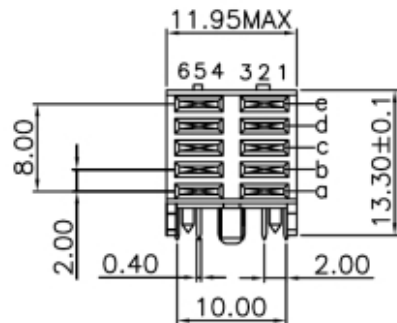




Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 3 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -65°C~+125°C.

*RoHS Compliant



FUP-Sxyy-5X02-LF

LEADFREE
02:2.90mm
03:3.53mm


R:R/A DIP

Q:R/APRESSFIT



RoHS Compliant

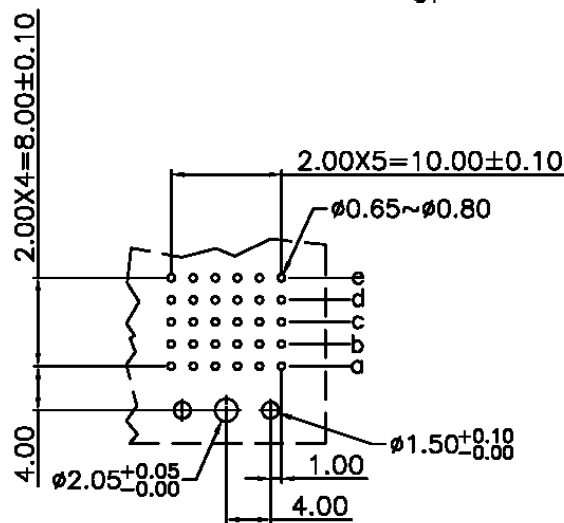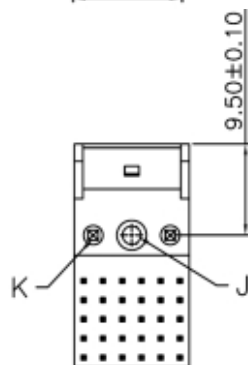

P.C. Board Layout

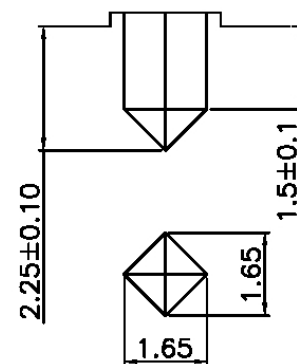

DETAIL: K



X	1	2
Length	2.90	3.53

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FUP-Sxyy-5X02

DWG NO. FUP-Sxyy-5X02

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIP TION:

AREA

H.D. Male 2.0mm(0.079")
Futurebus(+) 5 Rows
Female Dip Type

REVISIONS

HK

DATE

煜倫股份有限公司