


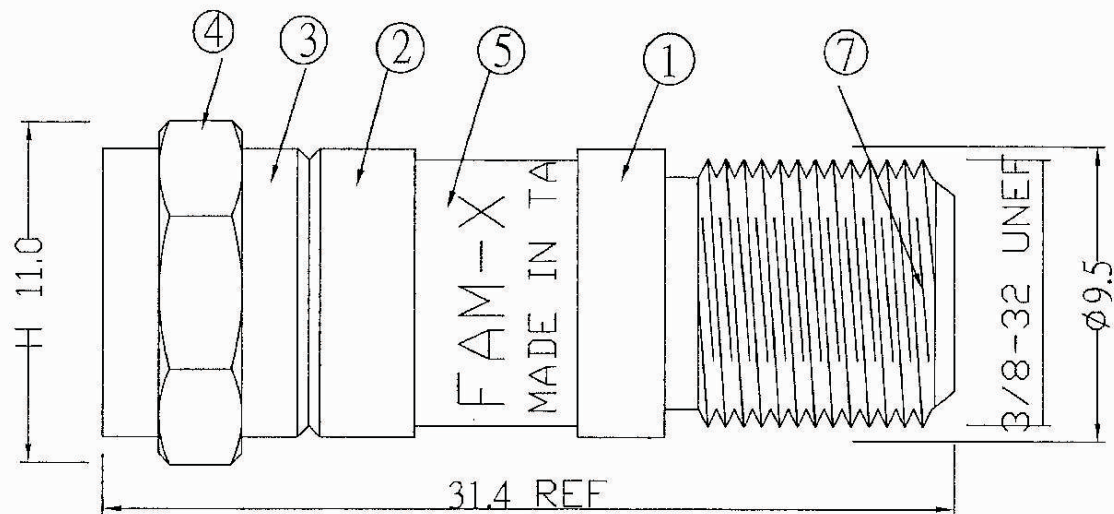

FX2-ESAxxDB-75-LF
03~20DB LEADFREE
RoHS Compliant

ELECTRONIC SPEC :

- 1.IMPEDANCE : 75 OHM
- 2.FREQUENCY RANGE : 0-2 GHZ
- 3.V.S.W.R : 1.3 AT 2 GHZ
- 4.DIELECTRONIC WITH STA
-NDING VOLTAGE : 1000 Vrms
- 5.VOLTAGE RATING : 500 Vrms PARK
- 6.INSULATION RESISTANCE : ≥ 5000 MEGAOHM
- 7.CONTACT RESISTANCE :
CENTER CONDUCTOR ≤ 2 MILLIOHM
OUTER CONDUCTOR ≤ 2 MINLLIOHM
- 8.TEMPERATURE : -40°C TO 80°C
- 9.INSERTION LOSS : $X \pm 10\%$ db

NOTE :

1. BODY : BRASS / NICKEL
2. INSULATION : NYLON 66 / NATURE
3. CONTACT : BRASS / TIN PLATED
4. NUT : BRASS / NICKEL
5. PC BOARD : FR4 , 0.8 THICKNESS
6. A : 3dB B : 6 dB C : 8 dB D : 10 dB
E : 12 dB F : 16 dB G : 20 dB
7. FEMALE CONTACT : BECU / GOLD

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FX2-ESAxxDB-75

DWG NO. FX2-ESAxxDB-75

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X $\pm$ 0.2
.XX $\pm$
.XXX $\pm$
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司