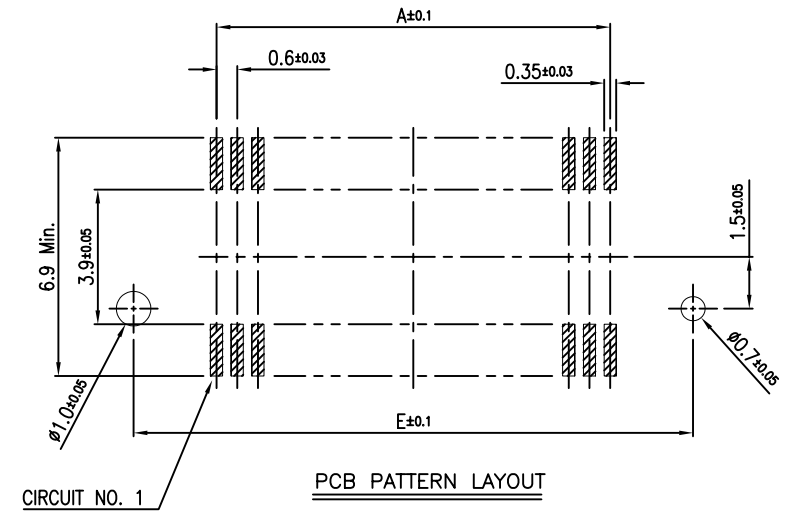
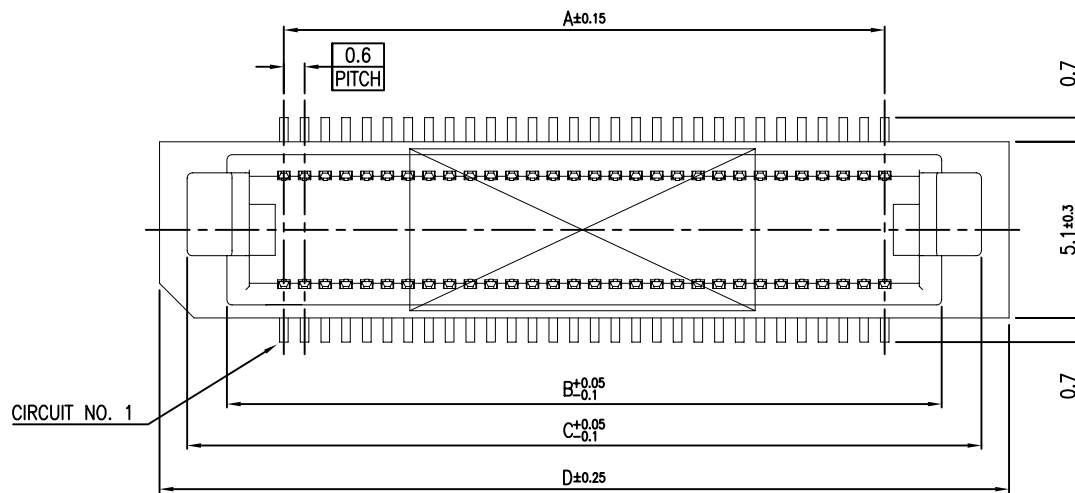


NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,
UL94V-0; COLOR:NATURAL.
1.2 CONTACT: COPPER ALLOY

2. FINISH:

- 1:GOLD FLASH PLATING(1~3u")
N:100~200u" MATT TIN PLATING
50~100u" NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C

CKT	DimA	DimB	DimC	DimD	DimE
40	11.4	14.7	17.0	18.6	16.2
60	17.4	20.7	23.0	24.6	22.2
80	23.4	26.7	29.0	30.6	28.2
90	26.4	29.7	32.0	33.6	31.2
100	29.4	32.7	35.0	36.6	34.2
120	35.4	38.7	41.0	42.6	40.2
140	41.4	44.7	47.0	48.6	46.2
160	47.4	50.7	53.0	54.6	52.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FX8-P08PC-xxx-LF
SERIES | CAP POST | UNMATED HIGH 0.8mm
LEADFREE
040~160WAY
PLUG

DESCRIPTION:0.6mm BTB PLUG SMT S T D R TYPE