


SPECIFICATIONS
 Current Rating: 0.4A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 45mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 300V AC/minute
 Pin Material: Phosphor Bronze/
 Tin-plated on solder area,
 Gold-flash on contact area
 Housing: Nylon 6T,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
FX8-P09PR-060	17.40	24.60	22.20
FX8-P09PR-080	23.40	30.60	28.20
FX8-P09PR-100	29.40	36.60	34.20

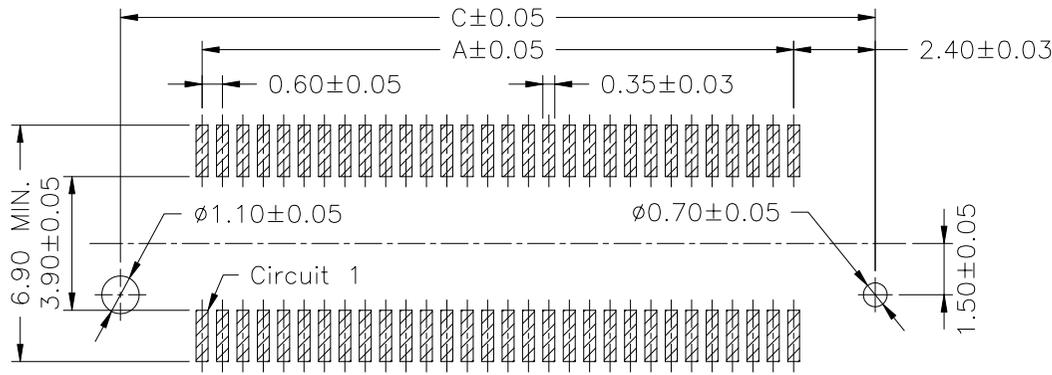

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

FX8-P09PR-xxx-LF
LEADFREE

RoHS Compliant



PART NO. FX8-P09PR-xxx

DWG NO. FX8-P09PR-xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

0.60mm PITCH
BOARD TO BOARD CONNECTOR,
SMT TYPE, HEIGHT: 3.0mm

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS


HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

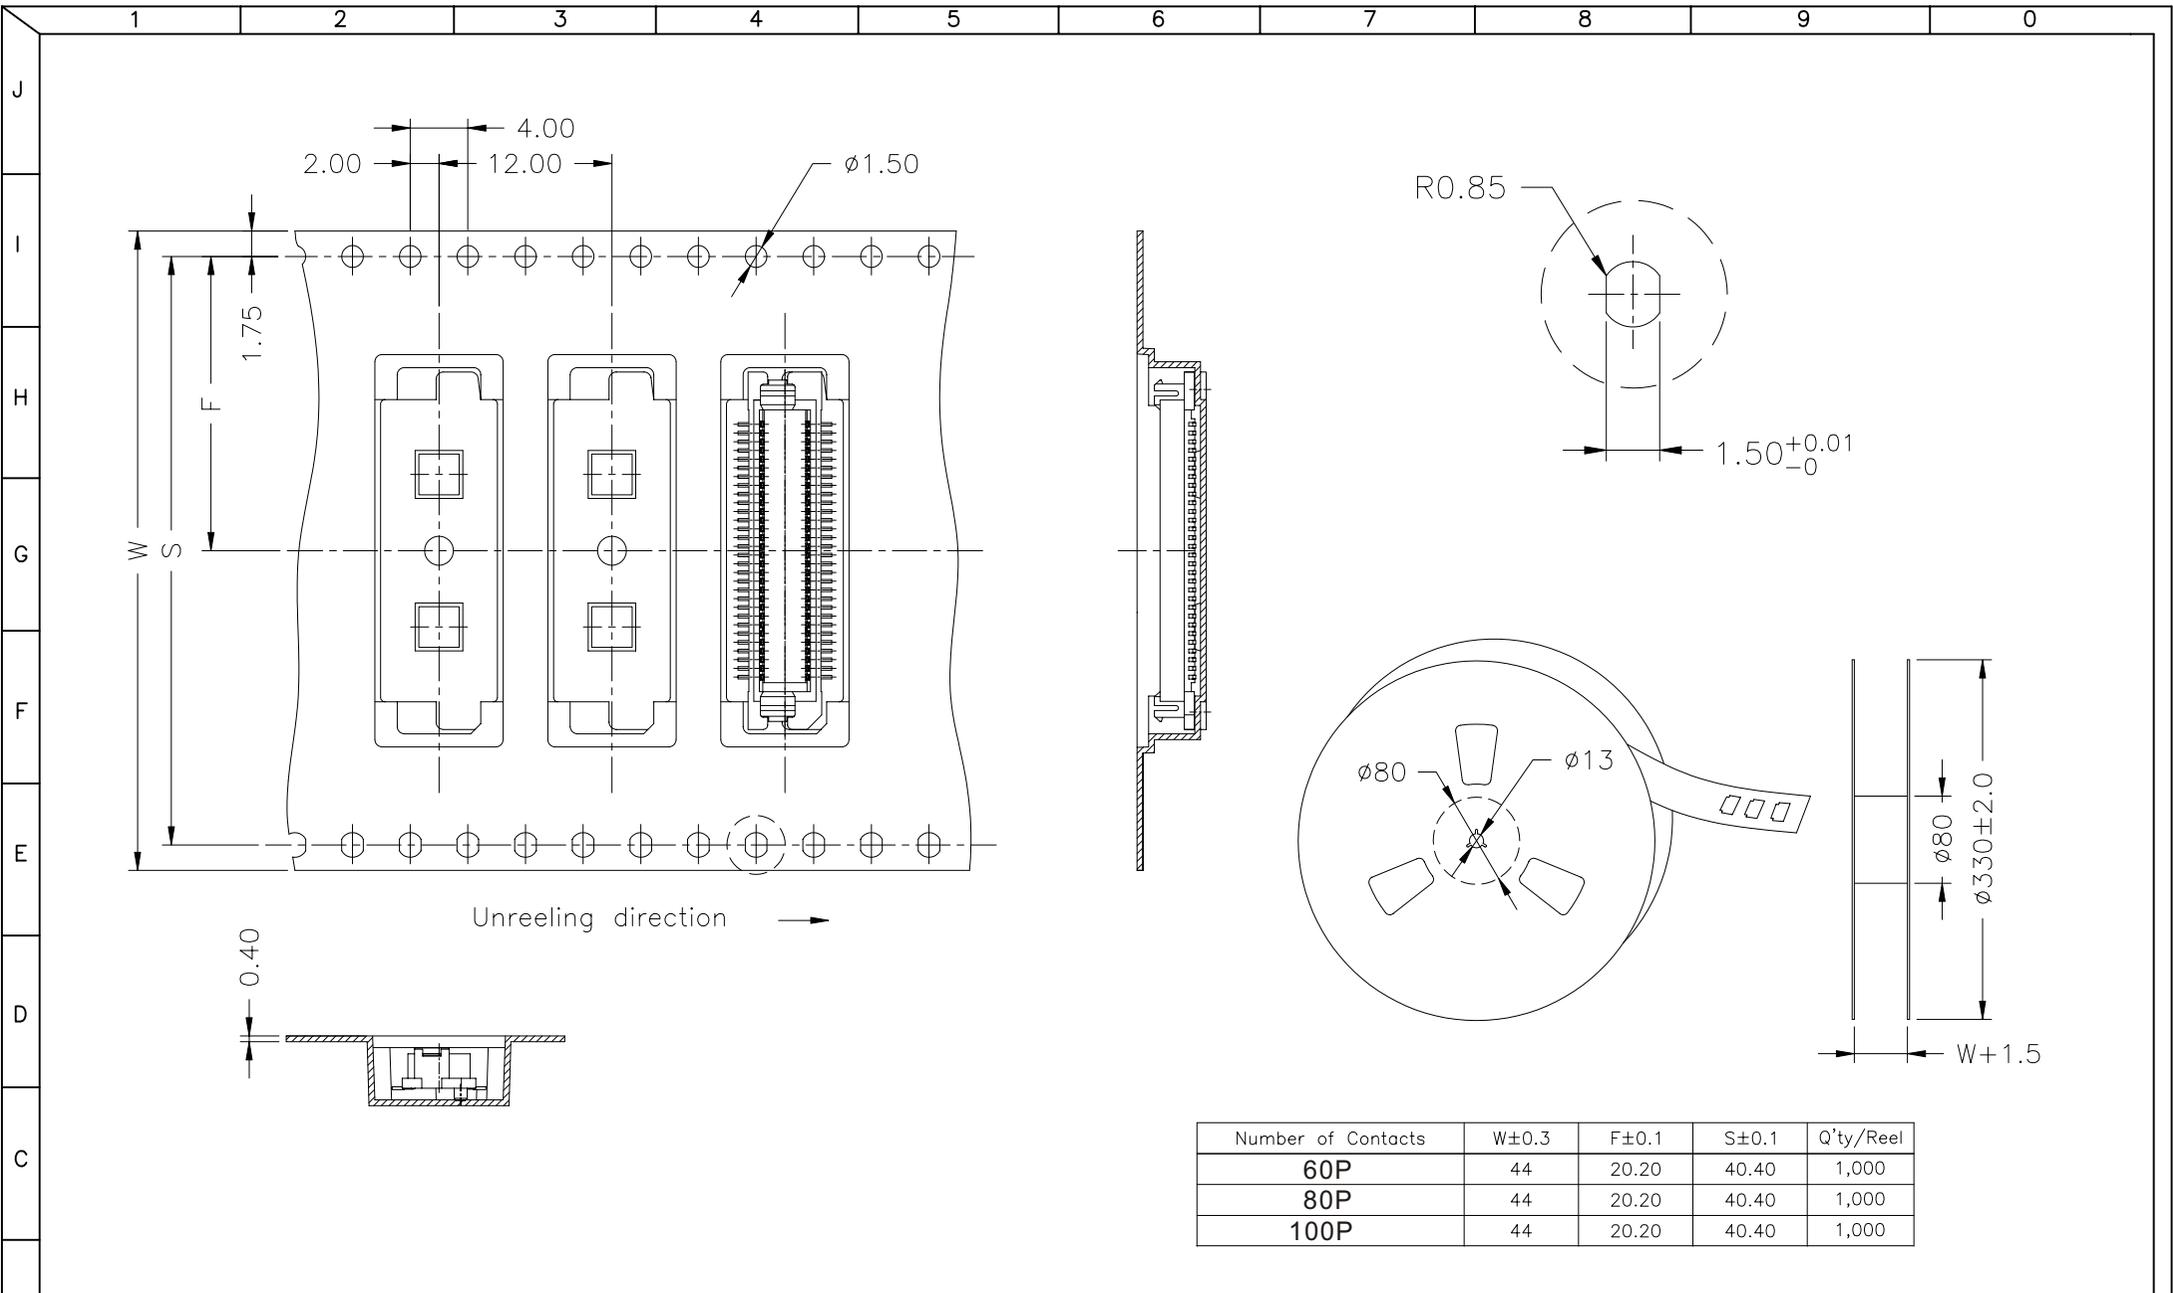

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
60P	44	20.20	40.40	1,000
80P	44	20.20	40.40	1,000
100P	44	20.20	40.40	1,000

	PART NO. FX8-P09PR-xxx		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIPTION: 0.60mm PITCH BOARD TO BOARD CONNECTOR, SMT TYPE, HEIGHT:3.0mm TAPING SPEC.
	DWG NO. FX8-P09PR-xxx			
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA REVISIONS HK DATE
	UNIT / mm	SCALE 1:1	PROJECTION	