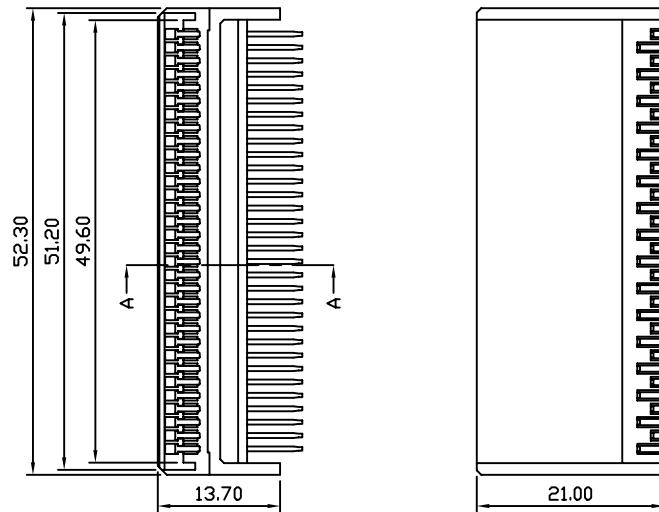


MATERIAL
INSULATOR: GLASS—REINFORCED
THERMOPLASTIC (PBT), UL94V-0 RATED.

CONTACT: COPPER ALLOY.
PLATING: MATING AREA— SELED GOLD OVER NICKEL.
SOLDER AREA— TIN/LEAD OVER NICKEL.

ELECTRICAL
DIELECTRIC WITHSTANDING VOLTAGE: 500V (R.M.S) AC
FOR 1 MINUTE.

CURRENT RATING: 1 AMP.
INSULATION RESISTANCE: 1,000 MEG OHMS MAX.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL
INSERTION FORCE: 100 GRAMS / PIN MAX.
WITHDRAWAL FORCE: 15 GRAMS / PIN MIN.

ENVIRONMENTAL
TEMPERATURE RANGE: -55° TO +85°.

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. GB-R-32

DWG NO. GB-R-32

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

GAME—BOY 32P

AREA

REVISIONS

HK

DATE

煜倫股份有限公司