
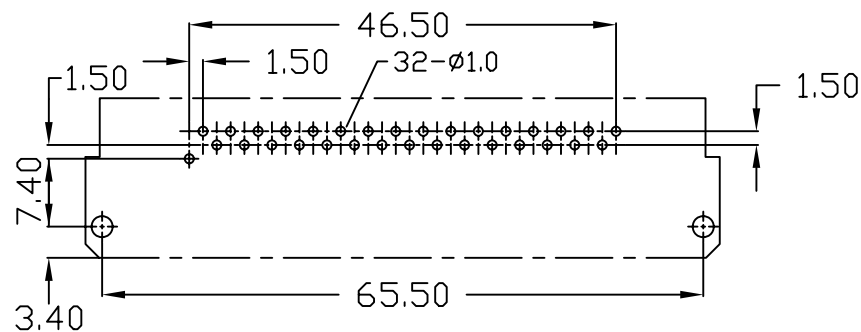
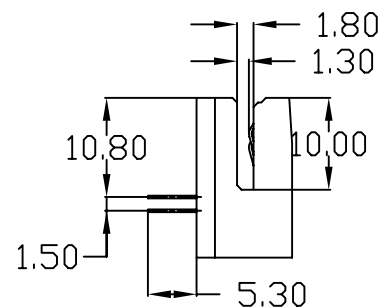
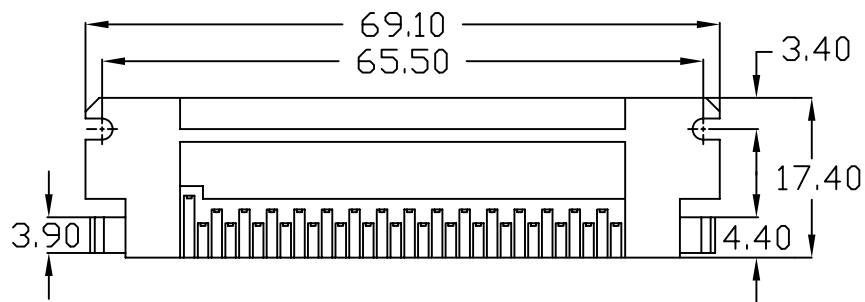


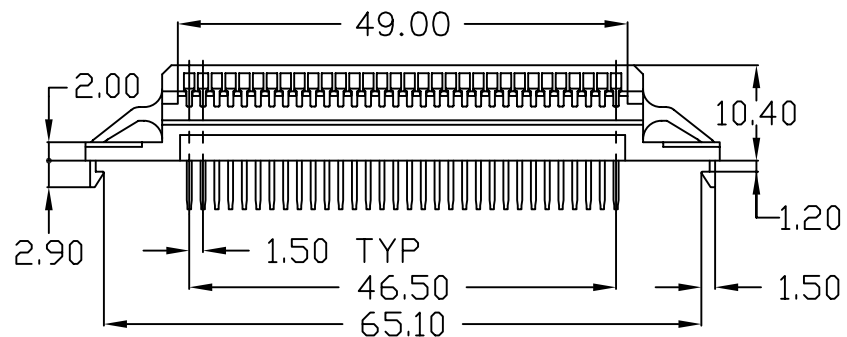

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE ± 0.05

MATERIAL
INSULATOR: GLASS-REINFORCED THERMOPLASTIC (ABS),
UL94V-0 RATED.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA- SELECTED GOLD OVER NICKEL.
SOLDER AREA- TIN/LEAD OR TIN OVER NICKEL.

ELECTRICAL
DIELECTRIC WITHSTANDING VOLTAGE: 500V (R.M.S) AC
FOR 1 MINUTE.

CURRENT RATING: 1 AMP.
INSULATION RESISTANCE: 1,000 MEG OHMS MAX.
CONTACT RESISTANCE: 20 MILLI OHMS MAX.

ENVIRONMENTAL
TEMPERATURE RANGE: -55° TO $+85^{\circ}$.

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. GB-RL-32

DWG NO. GB-RL-32

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X $\pm$ 0.2
.XX $\pm$
.XXX $\pm$
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司