
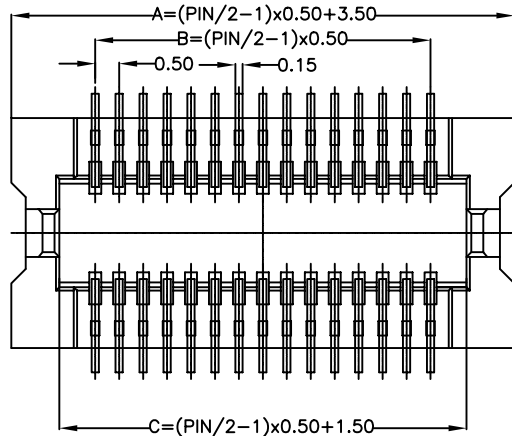
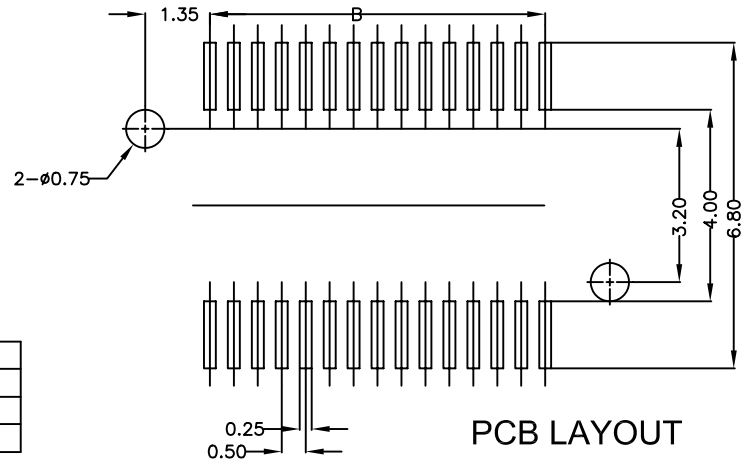


PIN	A	B	C	D	PIN	A	B	C	D
30P	10.50	7.00	8.50	9.70	100P	28.00	24.50	26.00	27.20
24P	9.00	5.50	7.00	8.20	80P	23.00	19.50	21.00	22.20
22P	8.50	5.00	6.50	7.70	70P	20.50	17.00	18.50	19.70
20P	8.00	4.50	6.00	7.20	60P	18.00	14.50	16.00	17.20
16P	7.00	3.50	5.00	6.20	50P	15.50	12.00	13.50	14.70
14P	6.50	3.00	4.50	5.70	40P	13.00	9.50	11.00	12.20
12P	6.00	2.50	4.00	5.20	36P	12.00	8.50	10.00	11.20
10P	5.50	2.00	3.50	4.70	34P	11.50	8.00	9.50	10.70

Stacking Height Variations	
	GB05-P02-xxx
GB05-S13-xxx	1.5
GB05-S18-xxx	2.0

NOTE:
 Specifications:
 1). Current rating:0.5Amps
 2).Voltage rating:AC,DC50V
 3).Contact resistance:40mΩ
 4).Insulation resistance:100MΩ
 5).Withstanding voltage:AC 500Vr.m.s(for one minute)
 6).Temperature range:-25°C~+85°C
 Material:
 1).Insulator:LCP UL94V-0
 2).Contact:Phosphor Bronze
 3).Plating:Gold Plating
 Number Of Connector:2500pcs/Reel
 Mating High:1.5/2.0mm



MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. GB05-S13-xxx									
DWG NO. GB05-S13-xxx		APPROVED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.15 .XXX AWG	DESCRIP TION:	0.5MM B TO B FEMALE 1.26MM HIGH				
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1 : 1	PROJECTION 			AREA	REVISIONS	HK	DATE	