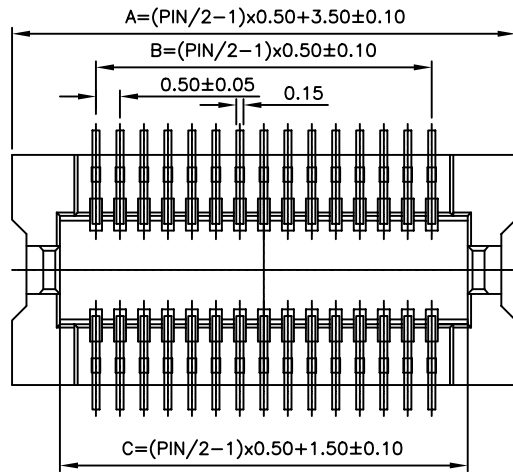





NOTE:

Specifications:


- 1). Current rating:0.5Amps
- 2).Voltage rating:AC,DC50V
- 3).Contact resistance:40mΩ
- 4).Insulation resistance:100MΩ
- 5).Withstanding voltage:AC 500Vr.m.s(for one minute)
- 6).Temperature range:−25°C~+85°C

Material:

- 1).Insulator:LCP UL94V-0
 - 2).Contact:Phosphor Bronze
 - 3).Plating:Gold Plating
- Number Of Connector:2500pcs/Reel
Mating High:1.5/2.0mm

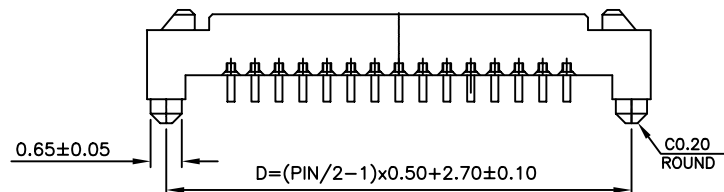

MATED DRAWING (REF)
SCALE: 5 : 1

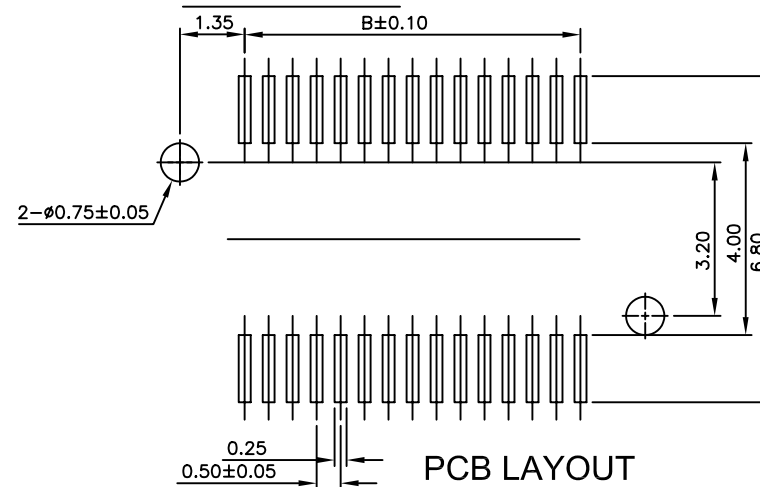

PIN	A	B	C	D	PIN	A	B	C	D
30P	10.50	7.00	8.50	9.70	100P	28.00	24.50	26.00	27.20
24P	9.00	5.50	7.00	8.20	80P	23.00	19.50	21.00	22.20
22P	8.50	5.00	6.50	7.70	70P	20.50	17.00	18.50	19.70
20P	8.00	4.50	6.00	7.20	60P	18.00	14.50	16.00	17.20
16P	7.00	3.50	5.00	6.20	50P	15.50	12.00	13.50	14.70
14P	6.50	3.00	4.50	5.70	40P	13.00	9.50	11.00	12.20
12P	6.00	2.50	4.00	5.20	36P	12.00	8.50	10.00	11.20
10P	5.50	2.00	3.50	4.70	34P	11.50	8.00	9.50	10.70

Stacking Height Variations	
	GB05-P02-xxx
GB05-S13-xxx	1.5
GB05-S18-xxx	2.0

MORE THAN ALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. GB05-S18-xxx

DWG NO. GB05-S18-xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.15
.XXX
AWG

DESCRIPTION:

0.5MM B TO B FEMALE 1.26MM HIGH

AREA

REVISIONS

HK

DATE