


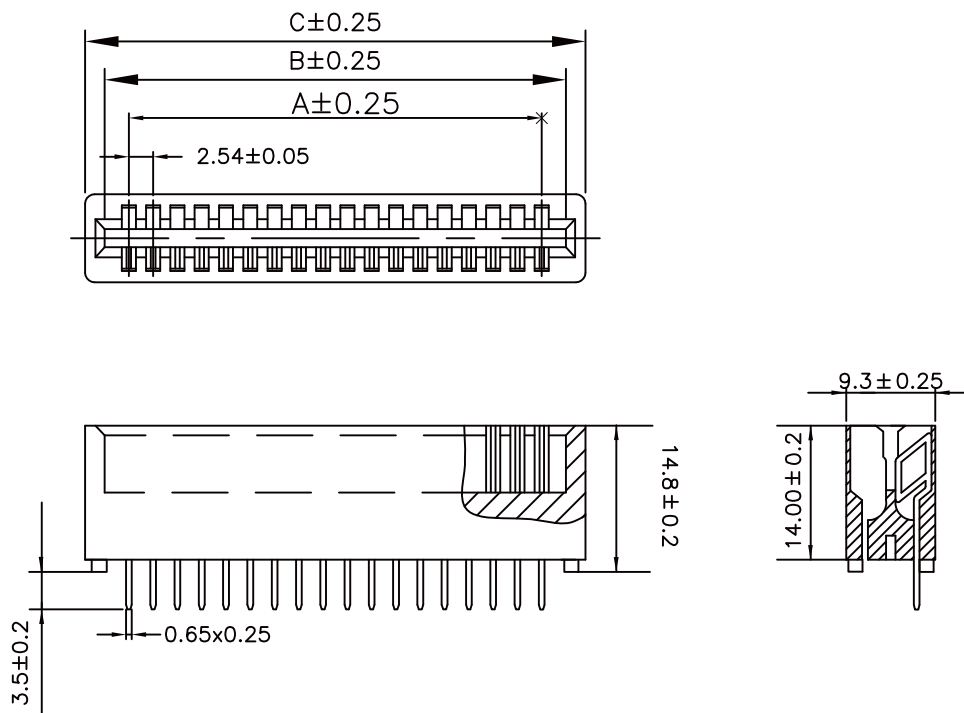

MATERIAL

- Insulator: Glass-Fiber P.B.T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Gold Plating Over Nickel.

SPECIFICATIONS

- Insulation Resistance: 5000 Ω min at 500 VDC
- Dielectric Withstanding Voltage: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m Ω max
- Operating Temperature: -55 $^{\circ}$ C to 105 $^{\circ}$ C
- Insertion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

DIMENSIONS

Circuits	A	B	C	Circuits	A	B	C
6(03)	5.08	10.66	14.22	40(20)	48.26	53.84	57.40
8(04)	7.62	13.20	16.76	42(21)	50.80	56.38	59.94
10(05)	10.16	15.74	19.30	44(22)	53.34	58.92	62.48
12(06)	12.70	18.28	21.84	46(23)	55.88	61.46	65.02
14(07)	15.24	20.82	24.38	48(24)	58.42	64.00	67.56
16(08)	17.78	23.36	26.92	50(25)	60.96	66.54	70.10
18(09)	20.32	25.90	29.46	52(26)	63.50	69.08	72.64
20(10)	22.86	28.44	32.00	54(27)	66.04	71.62	75.18
22(11)	25.40	30.98	34.54	56(28)	68.58	74.16	77.72
24(12)	27.94	33.52	37.08	58(29)	71.12	76.70	80.26
26(13)	30.48	36.06	39.62	60(30)	73.66	79.24	82.80
28(14)	33.02	38.60	42.16	62(31)	76.20	81.78	85.34
30(15)	35.56	41.14	44.70	64(32)	78.74	84.32	87.88
32(16)	38.10	43.68	47.24	66(33)	81.28	86.86	90.42
34(17)	40.64	46.22	49.78	68(34)	83.82	89.40	92.96
36(18)	43.18	48.76	52.32	70(35)	86.36	91.94	95.50
38(19)	45.72	51.30	54.86	72(36)	88.90	94.48	98.04
				80(40)	99.06	104.64	108.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

GE-D-1Xxx-LF
SERIES LEADFREE
1X03:03WAY
1X40:40WAY
DIP 180 $^{\circ}$

DESCRIPTION: