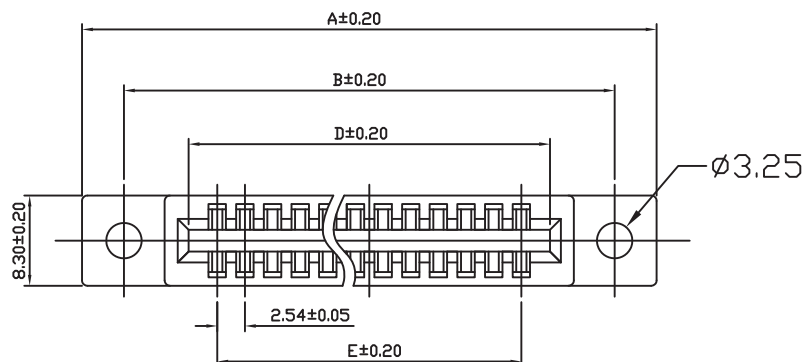


RECOMMENDED PCB LAYOUT

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC ,
UL94V-0 RATED.

CONTACT: COPPER ALLOY.

MATING AREA-G/F GOLD OVER NICKEL

SOLDER AREA- 100u TIN 50u NICKEL.

COLOR:GREEN

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +85°.

Pin NO. \ DIM.	A	B	C	D	E
6PIN	29.94	22.22	24.74	10.34	5.08

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

GE-DLE-006-LF
SERIES | LEADFREE
06 WAY
LOW EAR
DIP 180°

DESCRIPTION: