


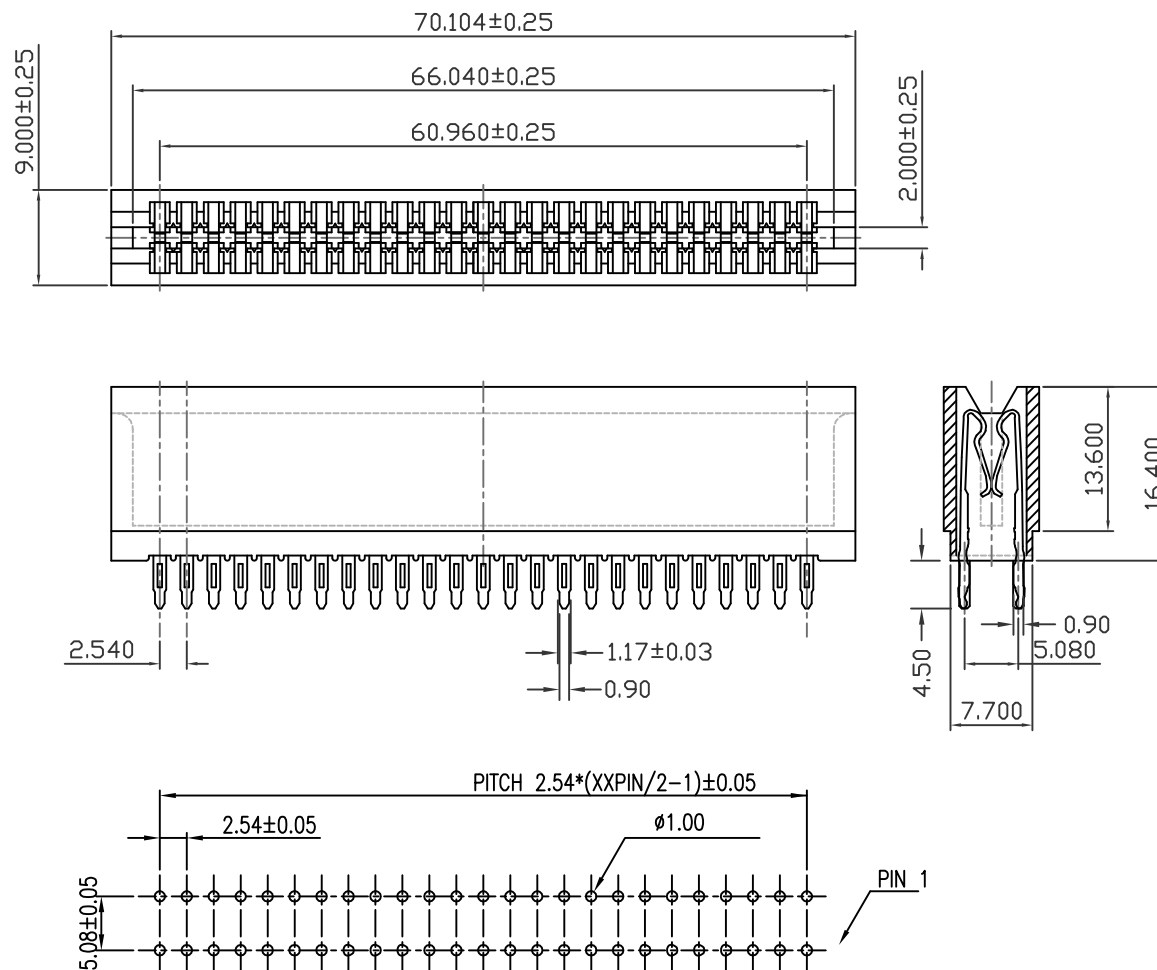

RECOMMENDED PCB LAYOUT

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.

CONTACT: COPPER ALLOY

PLATING: MATING AREA- 30u" GOLD OVER NICKEL.

SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +105°.

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

GE-PAS30-050-LF
SERIES
LEADFREE
50 WAY
SEMI GOLD 30u"
CLOSE
PRESS FIT

DESCRIPTION: