


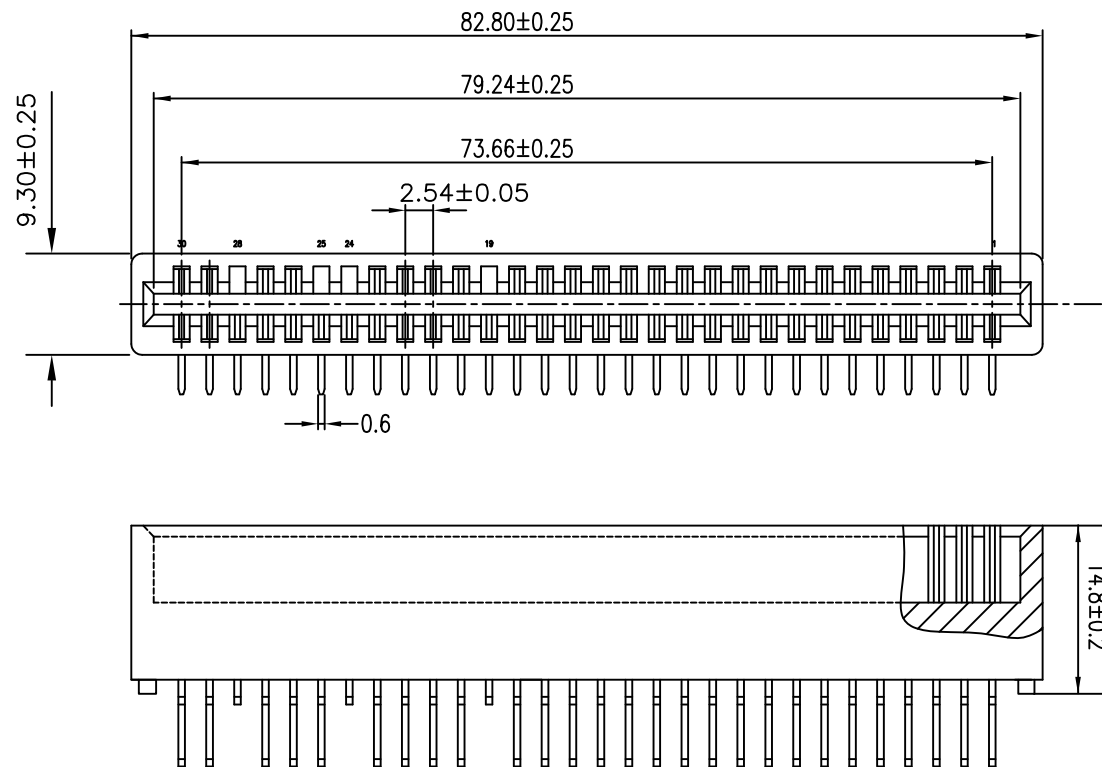

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.

CONTACT: COPPER ALLOY

PLATING: MATING AREA- 0U GOLD OVER NICKEL.
SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.


MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +105°.

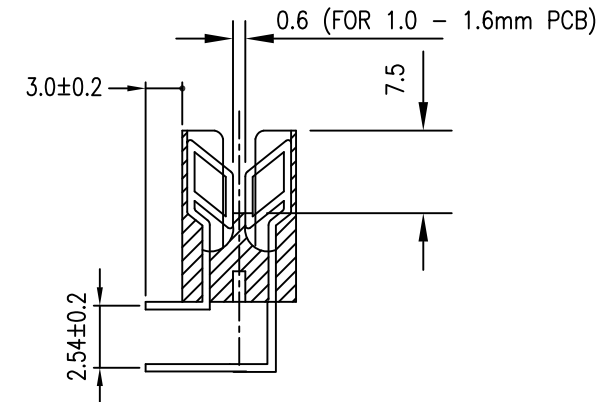

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

GE-R1-060E4-LF
SERIES LEADFREE
EMPTY 19.24.25.28 PIN
60 WAY
DIP 90°

DESCRIPTION: 60R(K19,24,25,28)