
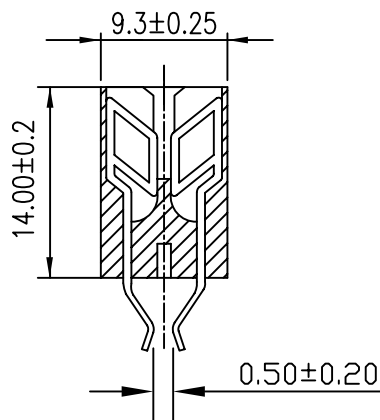





MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PBT),
UL94V-0 RATED.

CONTACT: COPPER ALLOY

PLATING: MATING AREA- OU GOLD OVER NICKEL.

SOLDER AREA- TIN OVER NICKEL.

ELECTRICAL

DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5,000 MEG. OHMS MIN. AT 500 VDC.

CONTACT RESISTANCE: 20 MILLI OHMS MAX.

MECHANICAL

INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.

WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +105°.

GE-Y-010(16)G-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. GE-Y-010(16)G

DWG NO. GE-Y-010(16)G

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

PITCH2.54 CARD EDGE 10PIN DIP OPEN

AREA

REVISIONS

HK

DATE

煜倫股份有限公司