


Material:

- *Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
- *Contact Post: 0.20mm^t, Phosphor Bronze, Matte Tin Plated.
- *Solder Tab: 0.20mm^t Brass, Matte Tin Plated.

Note: RoHS and Halogen Free Compliance.

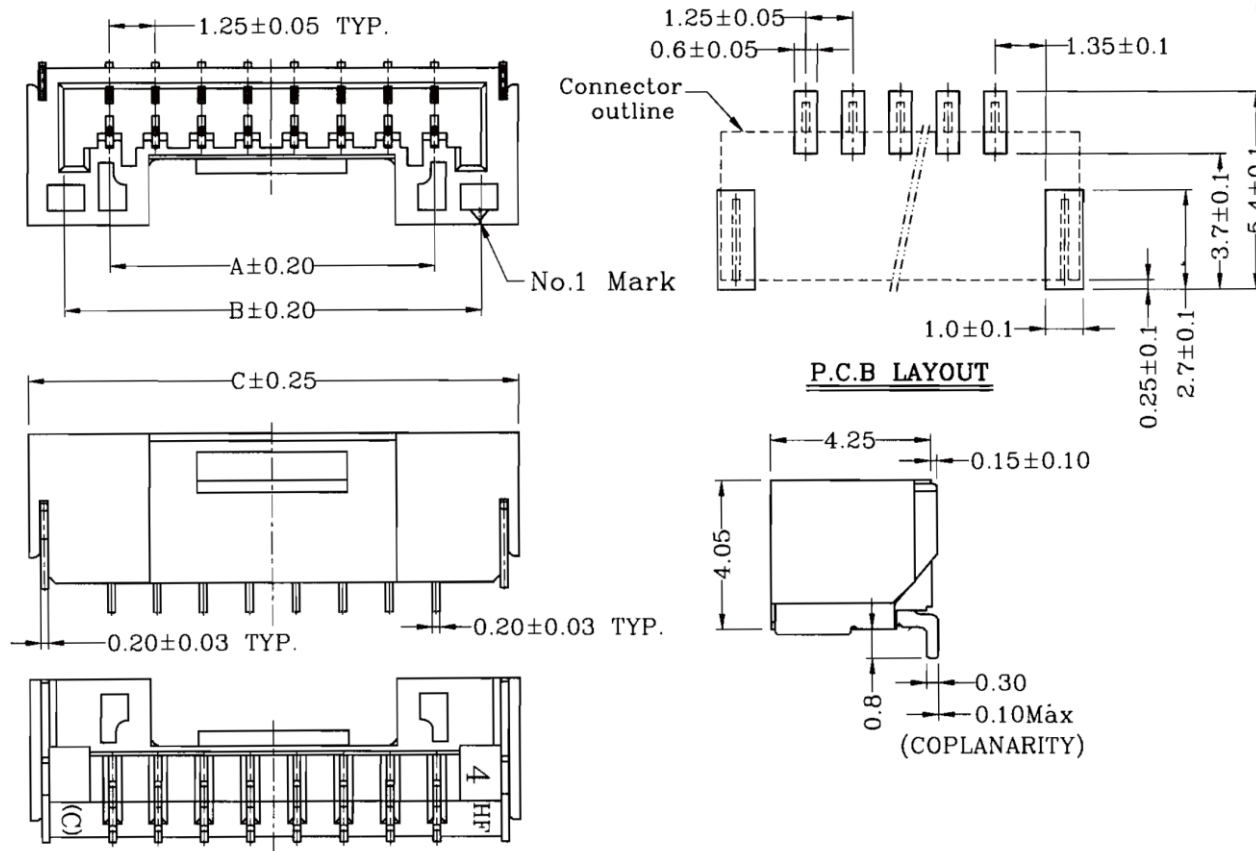

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Qty/Reel
		A	B	C	
2	GH-WR-02	—	3.75	5.75	1000
3	GH-WR-03	2.50	5.00	7.00	1000
4	GH-WR-04	3.75	6.25	8.25	1000
5	GH-WR-05	5.00	7.50	9.50	1000
6	GH-WR-06	6.25	8.75	10.75	1000
7	GH-WR-07	7.50	10.00	12.00	1000
8	GH-WR-08	8.75	11.25	13.25	1000
9	GH-WR-09	10.00	12.50	14.50	1000
10	GH-WR-10	11.25	13.75	15.75	1000
11	GH-WR-11	12.50	15.00	17.00	1000
12	GH-WR-12	13.75	16.25	18.25	1000
13	GH-WR-13	15.00	17.50	19.50	1000
14	GH-WR-14	16.25	18.75	20.75	1000
15	GH-WR-15	17.50	20.00	22.00	1000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

GH-WR-xx-LF
SERIES | T | LEADFREE
02~15 WAY
REEL
90°SMT


DESCRIPTION:

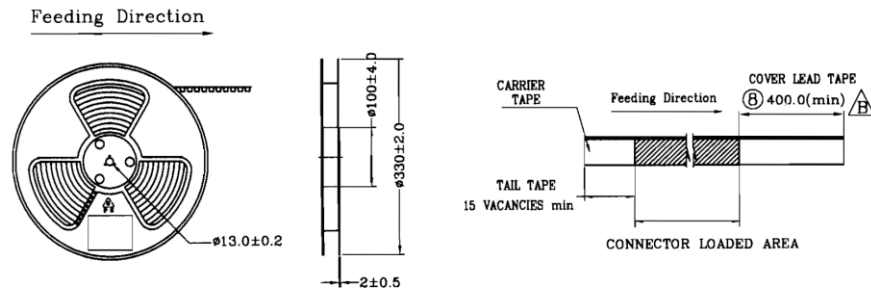

2 TO 8 CIRCUITS

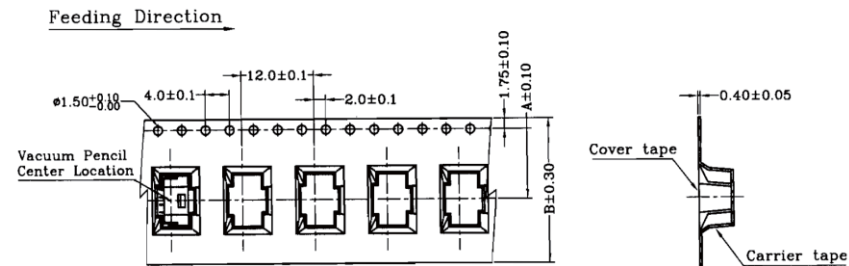

9 TO 15 CIRCUITS

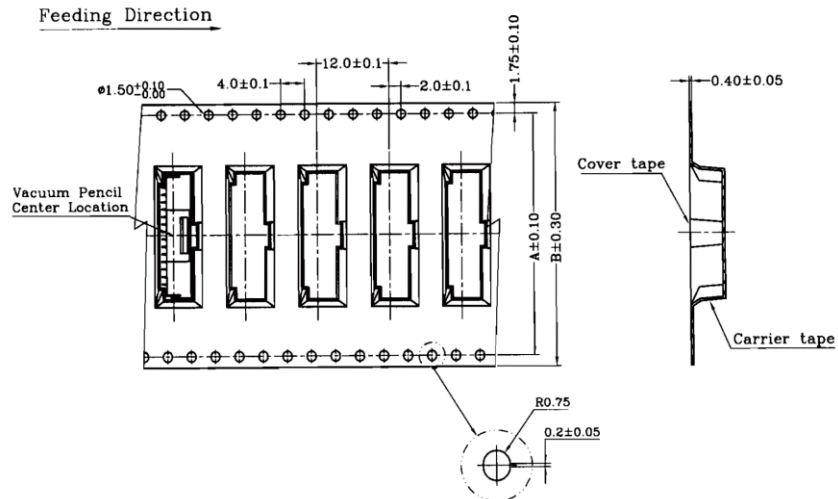

Circuits	Dimensions		Qty/Reel
	A	B	
2	7.50	18.00	1000
3	11.50	24.00	1000
4	11.50	24.00	1000
5	11.50	24.00	1000
6	11.50	24.00	1000
7	11.50	24.00	1000
8	11.50	24.00	1000
9	28.40	32.00	1000
10	28.40	32.00	1000
11	28.40	32.00	1000
12	28.40	32.00	1000
13	40.40	44.00	1000
14	40.40	44.00	1000
15	40.40	44.00	1000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

GH-WR-xx-LF
SERIES | LEADFREE
| 02~15 WAY
| REEL
| 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: