


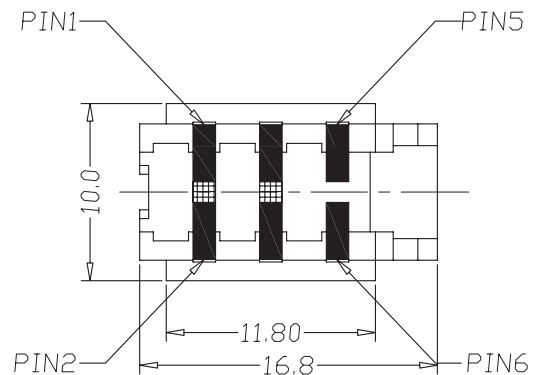




NOTES:

1. INSULATOR: PBT(UL 94V-0), COLOR: WHITE
2. CONTACT: PHOSPHOR BRONZE, T=0.25mm
3. PLATING:
 - PIN 1~4PIN: 30U" GOLD PLATING ON CONTACT AREA, 100U" MIN. PLATING ON SOLDERTAILS
 - 50U" MIN. NICKEL UNDERPLATING OVERALL
 - PIN 5~6PIN: 100U" MIN. PLATING ON SOLDERTAILS
 - 50U" MIN. NICKEL UNDERPLATING OVERALL

SPECIFICATION:

- 1.CURRENT RATING: 3A AC,DC
- 2.VOLTAGE RATING: 250V AC,DC
- 3.TEMPERATURE RANGE: -25°C TO +85°C (INCLUDING TEMPERATURE RISE)
- 4.INSULATION RESISTANCE: 1000M OHM MIN.
- 5.WITHSTANDING VOLTAGE: 500V AC/MIN.
- 6.CONTACT RESISTANCE: INITIAL VALUE/20m OHM MAX. AFTER ENVIRONMENTAL TESTING/30m OHM MAX.

重點尺寸標注: [X X]

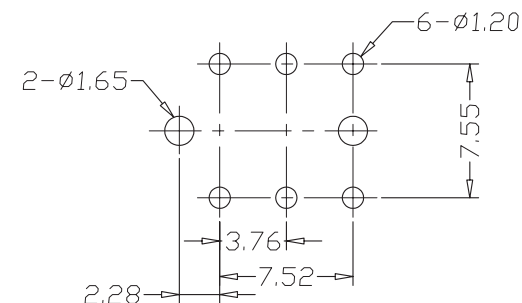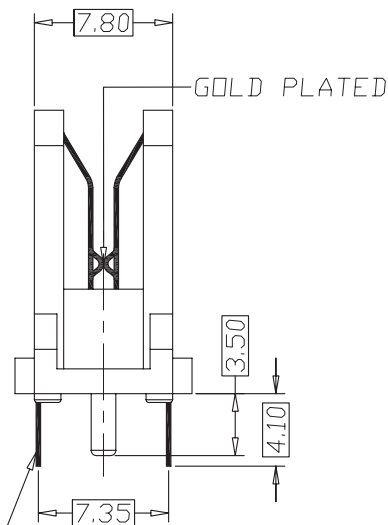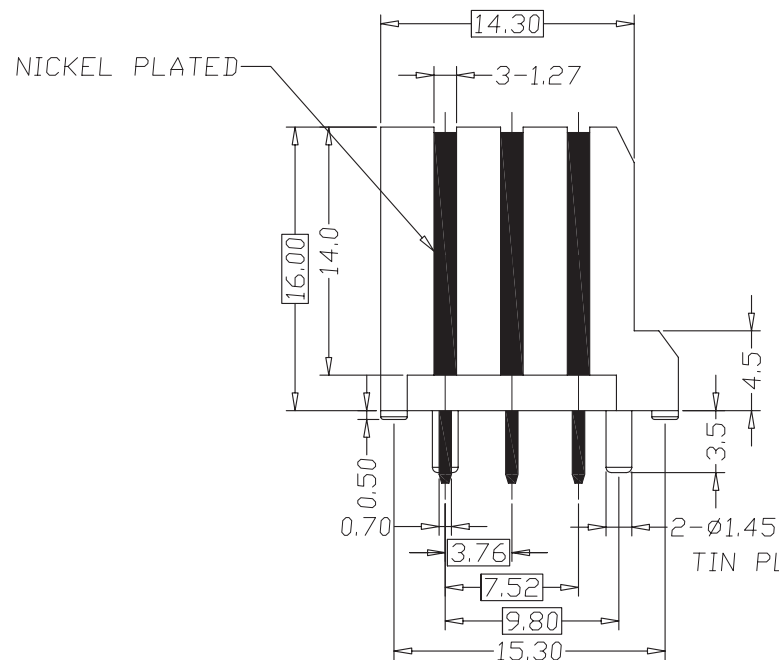

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05

GJ-DP-06-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. GJ-DP-06

DWG NO. GJ-DP-06

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: 德國電信頭 半金30U"

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

