


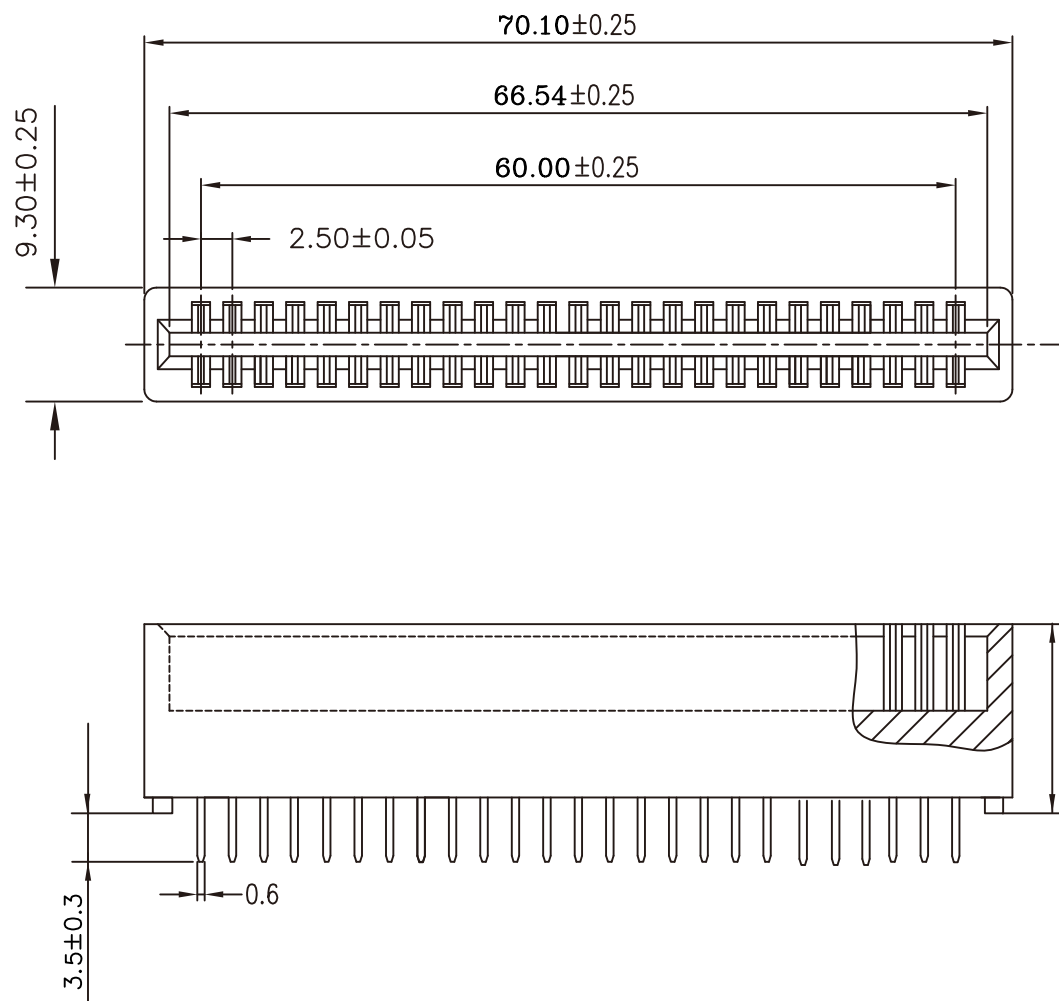


■ MATERIAL

- Insulator: Glass-Fiber P.B.T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Glod Plating Over Nickel.

■ SPECIFICATIONS

- Insulation Resistance: $5000 M\Omega$ min at 500 VDC
- Dielectric Withstanding Volatge: $1000 V-AC/1$ min
- Current Rating: 3A
- Contact Resistance: $20m\Omega$ max
- Operating Temperature: $-55^{\circ}C$ to $105^{\circ}C$
- Insartion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

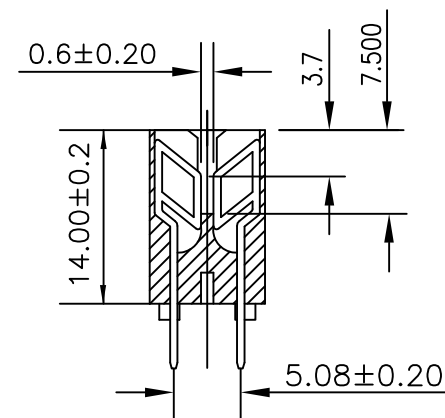

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

ORDER INFORMATION

GS-D-050-LF

SERIES | LEADFREE
50 WAY
DIP 180°

DESCRIPTION: