
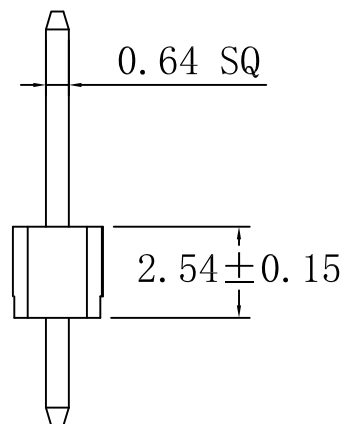
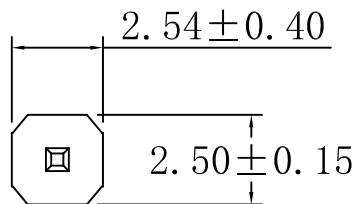


P. C. B LAYOUT

MATERIAL
 HOUSING : PBT,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FALSH
 COLOR : BLACK

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : 1000 V AC/minute

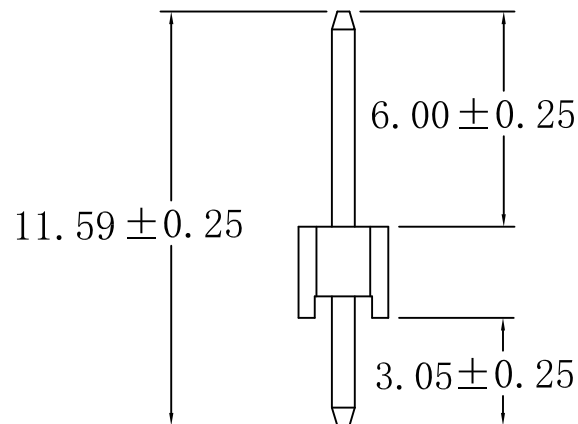

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

照片框

ORDER INFORMATION

H-D-1X01-LF
 SERIES | LEADFREE
 01 WAY
 DIP 180°

DESCRIPTION: