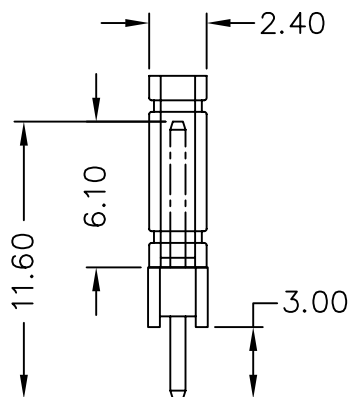
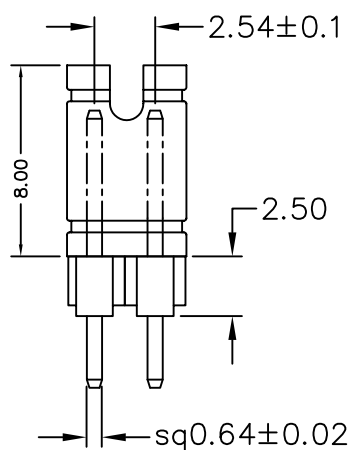
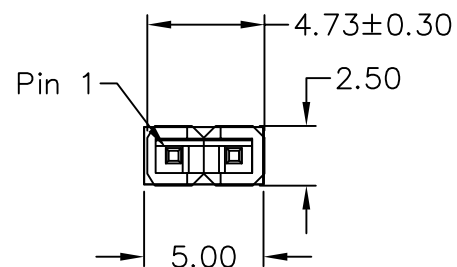


Recommended P.C.B Layout

MATERIAL

PIN HEADER Contact Pin : Brass

MINI JUMPER Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Min. Ω at DC 500V

Contact Resistance : 20m Ω Max. Ω at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

H-D-1X02JB8-LF
SERIES | JUMPER OPEN 8mm
LEADFREE
1X02:02WAY
DIP 180°

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW + MINI JUMPER