


**MATERIAL**

Insulator : PBT UL94-V0  
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

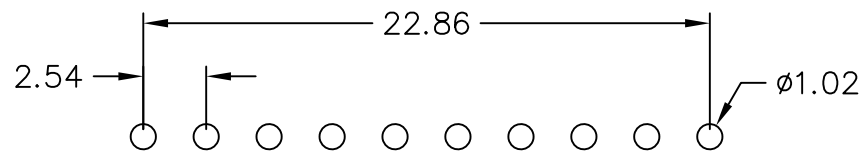

Recommended P.C.B Layout

**RoHS Compliant**


TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	

照片框

**ORDER INFORMATION**

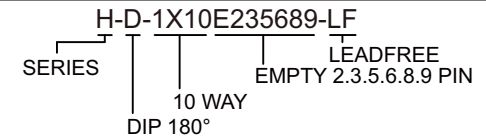

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT TYPE, SINGLE ROW