



RECOMMENDED P.C.B LAYOUT

MATERIAL
 HOUSING : PBT,UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD-FLASH
 COLOR : BLACK

SPECIFICATION

CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 1000V RMS

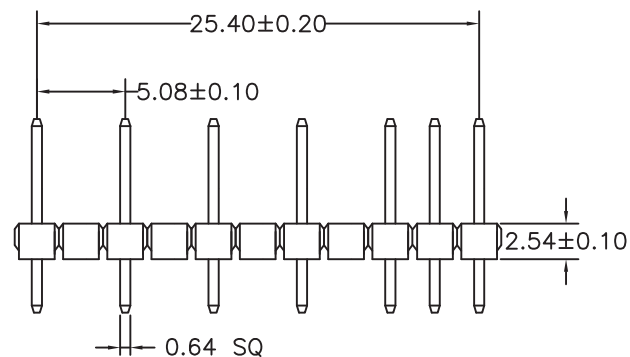

A: 11.59 mm B: 6.00 mm C: 3.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H-D-1X11E2468-LF
 SERIES 11 WAY DIP 180°
 LEADFREE
 EMPTY 2.4.6.8 PIN

DESCRIPTION: PIN HEADER 2.54 180° H:2.54