

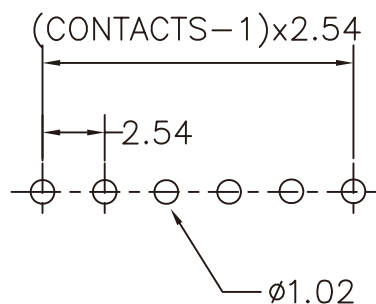
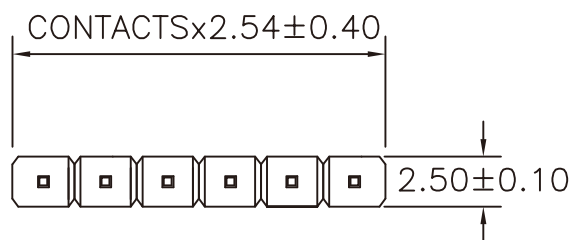


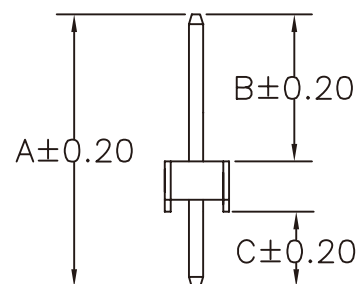

## RECOMMENDED P.C.B LAYOUT

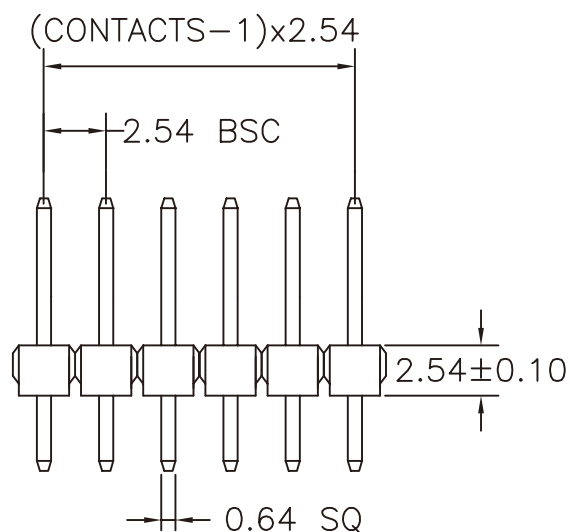

A: 11.54 mm B: 6.00 mm C: 3.00 mm

| CONTACTS | 1X26 |
|----------|------|
| 1X2      | 1X27 |
| 1X3      | 1X28 |
| 1X4      | 1X29 |
| 1X5      | 1X30 |
| 1X6      | 1X31 |
| 1X7      | 1X32 |
| 1X8      | 1X33 |
| 1X9      | 1X34 |
| 1X10     | 1X35 |
| 1X11     | 1X36 |
| 1X12     | 1X37 |
| 1X13     | 1X38 |
| 1X14     | 1X39 |
| 1X15     | 1X40 |
| 1X16     | 1X41 |
| 1X17     | 1X42 |
| 1X18     | 1X43 |
| 1X19     | 1X44 |
| 1X20     | 1X45 |
| 1X21     | 1X46 |
| 1X22     | 1X47 |
| 1X23     | 1X48 |
| 1X24     | 1X49 |
| 1X25     | 1X50 |

## MATERIAL

HOUSING : PBT,UL94V-0  
 CONTACT : COPPER ALLOYS  
 PLATED : GOLD FALSH  
 COLOR : BLACK

## SPECIFICATION

CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 1000V RMS

## RoHS Compliant

## TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.20  
 .XX ± 0.10  
 .XXX ±  
 ANG ±

PPOJECTION



## ORDER INFORMATION

H-D-1Xxx-LF  
 SERIES LEADFREE  
 1X02:02WAY  
 1X50:50WAY  
 DIP 180°

DESCRIPTION: