



P.C.B. LAYOUT

MATERIAL

HOUSING :PBT, UL-94V0
 CONTACT :COPPER ALLOYS
 PLATED :GOLD FLASH
 COLOR :BLACK

SPECIFICATION

CURRENT : 3A
 OPERATING TEMPERAURE : -55° C TO +105° C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN
 WITHSTAND VOLTAGE : 1000 V AC/minute

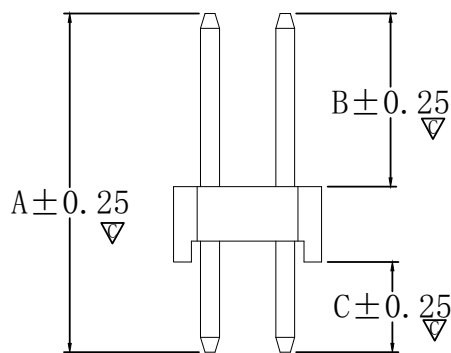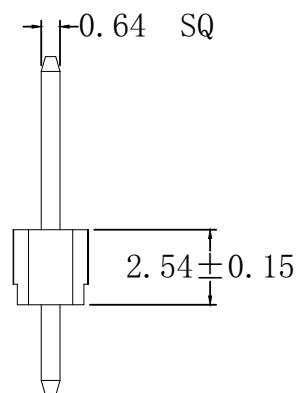

A: 11.59 mm B: 6.05 mm C: 3.00 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

照片框

ORDER INFORMATION

H-D-2X01-LF
 SERIES | LEADFREE
 02 WAY
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: