
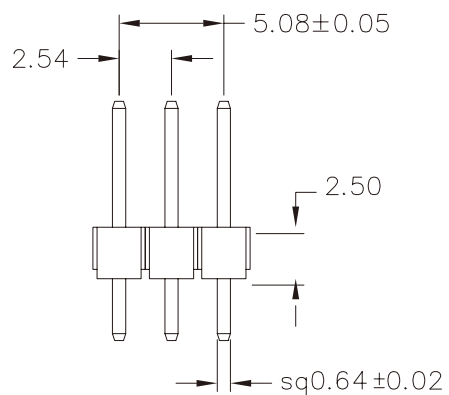



Recommended P.C.B Layout

## MATERIAL

Insulator : 30% Glass fiber UL 94V-0 P.B.T

Contact Pin : Brass **Gold Flash**

## SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

照片框

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG ±

SIZE A4

PPOJECTION

**ORDER INFORMATION**

H-D-2X03-LF  
SERIES | LEADFREE  
06 WAY  
DIP 180°

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: