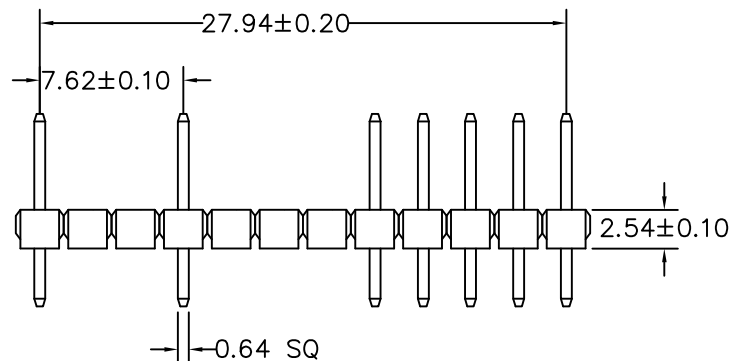
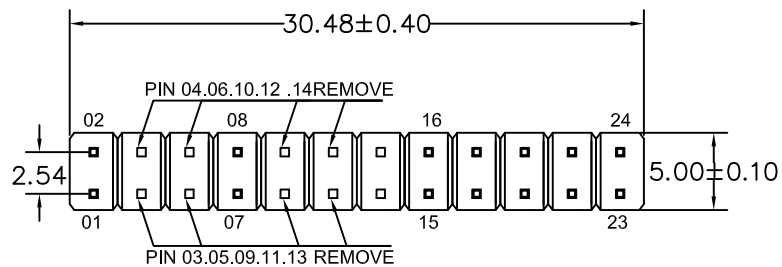


RECOMMENDED P.C.B LAYOUT

A: 11.43 mm B: 5.84 mm C: 3.05 mm

MATERIAL
 HOUSING : PBT, UL94V-0
 CONTACT : COPPER ALLOYS
 PLATED : GOLD FLASH & TIN-PLATED
 COLOR : BLACK

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE: AC 1000V RMS

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

H-D-2X12E10C-LF
 SERIES
 LEADFREE
 EMPTY 3.4.5.6.9.10.11.12.13.14 PIN
 24 WAY
 DIP 180°

DESCRIPTION: PIN HEADER 2.54 180° H:2.54 2X12(N3.4.5.6.9.10.11.12.13.14)PIN