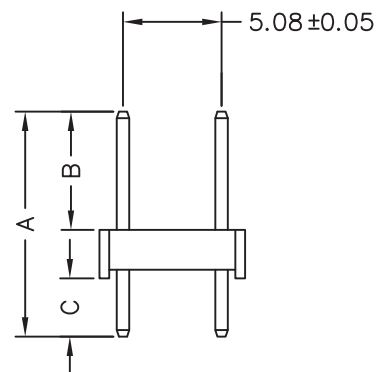
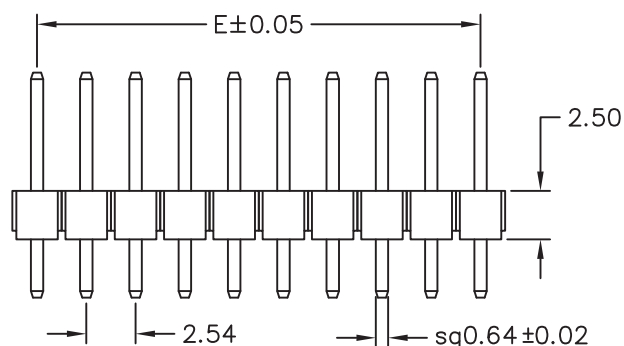
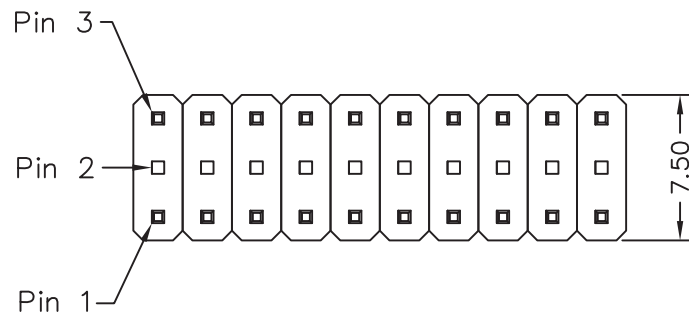


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		26	63.50
2	2.54	27	66.04
3	5.08	28	68.58
4	7.62	29	71.12
5	10.16	30	73.66
6	12.70	31	76.20
7	15.24	32	78.74
8	17.78	33	81.28
9	20.32	34	83.82
10	22.86	35	86.36
11	25.40	36	88.90
12	27.94	37	91.44
13	30.48	38	93.98
14	33.02	39	96.52
15	35.56	40	99.06
16	38.10	41	101.60
17	40.64	42	104.14
18	43.18	43	106.68
19	45.72	44	109.22
20	48.26	45	111.76
21	50.80	46	114.30
22	53.34	47	116.84
23	55.88	48	119.38
24	58.42	49	121.92
25	60.96	50	124.46

CODE	DIM A	DIM B	DIM C
H-D-3XxxEB	11.60	6.10	3.00

If you need other dimensions,
please fill out Dim A/B/C or
contact our sales representatives.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

H-D-3XxxEB-LF
SERIES LEADFREE
EMPTY 2 ROW
3X02:06 WAY
3X50:150 WAY
DIP 180°

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, TRIPLE ROWS