






**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩmin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute

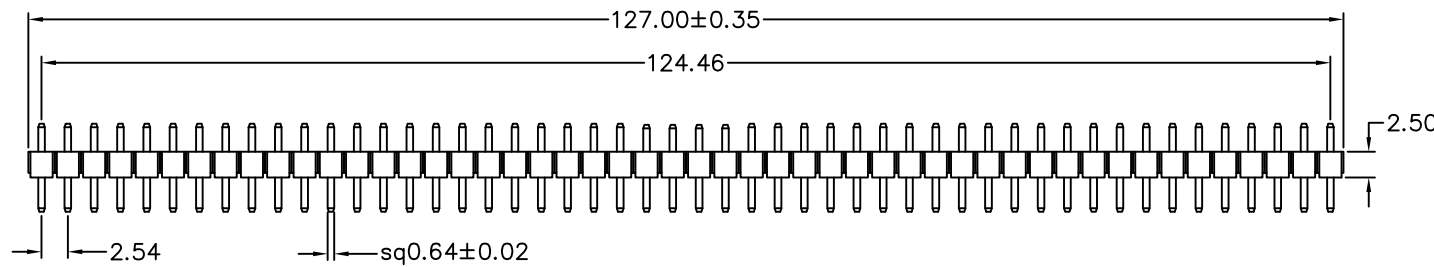

Recommended P.C.B Layout

H-D0852733-1X50-LF  
 LEADFREE  
 RoHS Compliant

	PART NO. H-D0852733-1X50		TOLERANCES ARE X, ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG	DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW
	DWG NO. H-D0852733-1X50			
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA REVISIONS DATE
	UNIT / mm	SCALE 1:1	PROJECTION	