

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V





Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

H-D0853030-1X07-LF

LEADFREE

RoHS Compliant

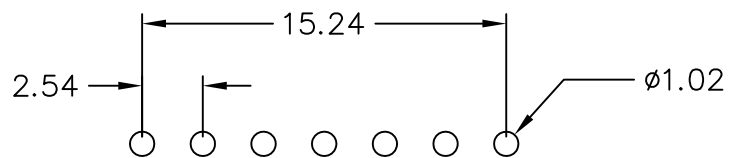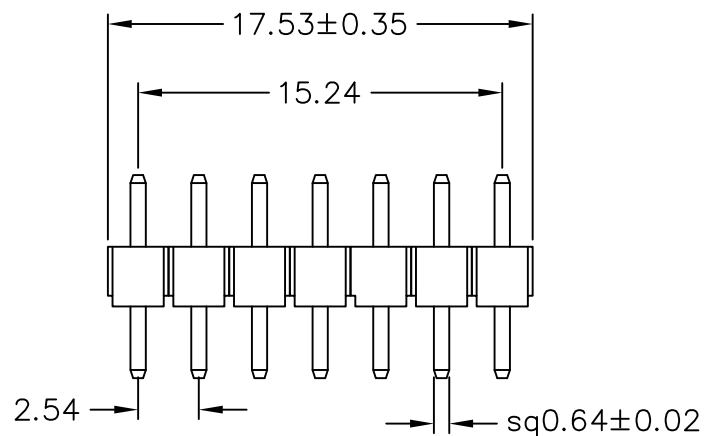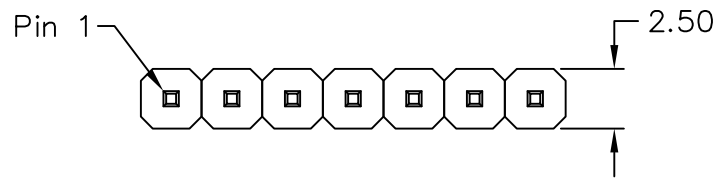

Recommended P.C.B Layout

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. H-D0853030-1X07

DWG NO. H-D0853030-1X07

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X. ± 0.3

.X ± 0.2

.XX ±

.XXX ±

ANG ± 3°

DESCRIPTION:

PIN HEADER 2.54\*2.54mm  
STRAIGHT TYPE, SINGLE ROW

焜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

DATE