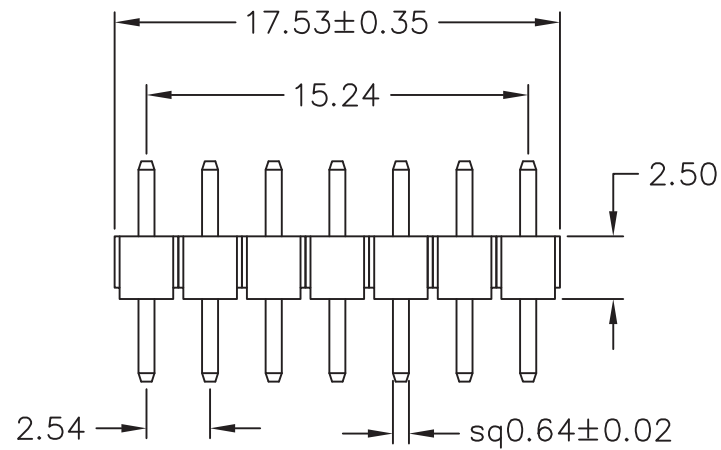
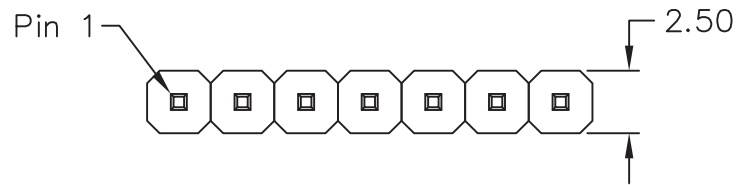


Recommended P.C.B Layout

## MATERIAL

Contact Pin : Brass

## SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

H-D088030033-1X07-LF  
SERIES | TOTAL 8.8mm | DIP 180°  
DIP 3.3mm | CONTACT 3.0mm | 07 WAY | LEADFREE

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT TYPE, SINGLE ROW