
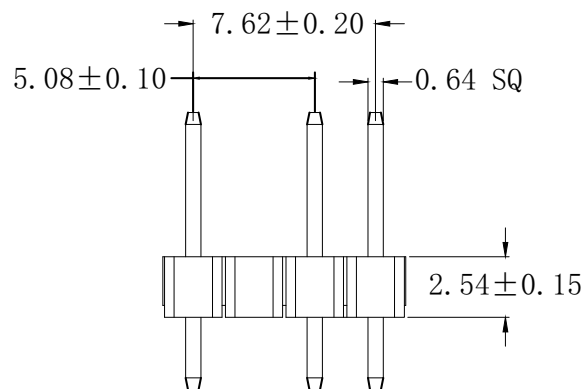
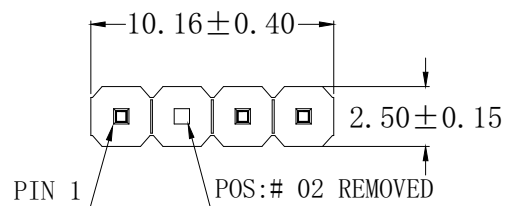


P. C. B . LAYOUT



A: 16.34 mm

B: 7.70 mm

C: 6.10 mm

MATERIAL

HOUSING :PBT, UL-94V0

CONTACT :COPPER ALLOYS

PLATED :GOLD FLASH

COLOR :BLACK

SPECIFICATION

CURRENT : 3A

OPERATING TEMPERAURE : -55°C TO $+105^{\circ}\text{C}$

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 1000 V AC/minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X ± 0.38
.XX ± 0.25
.XXX $\pm$
ANG $\pm 5^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

H-D163077061-1X04E2-LF
SERIES
DIP 180°
CONTACT 7.7mm
TOTAL LENGTH 16.34mm
04WAY
DIP:6.1mm
LEADFREE
EMPTY#2

DESCRIPTION: 2.54PH 180° H:2.54 1*4(N2) PIN