
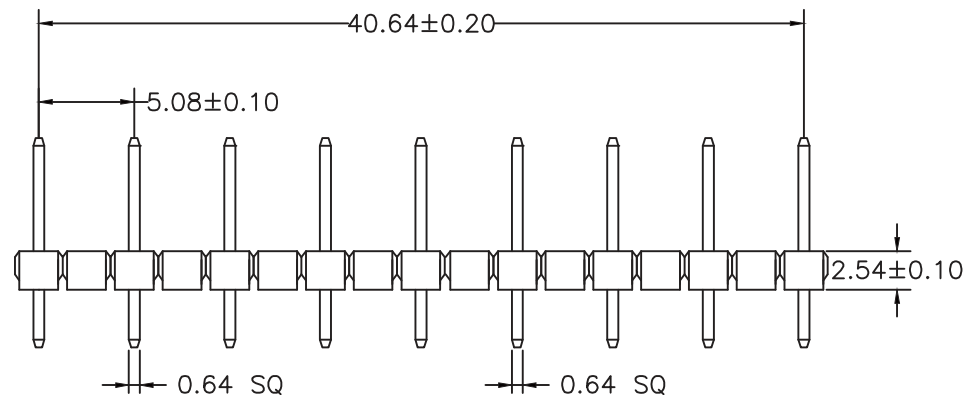
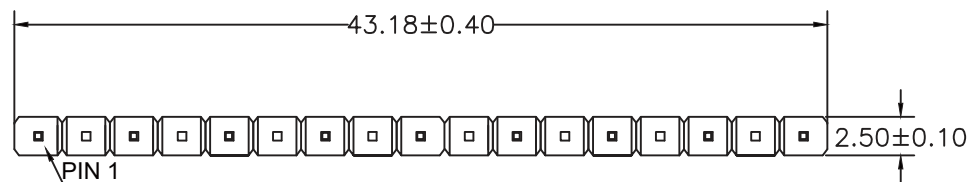


RECOMMENDED P.C.B LAYOUT

A: 17.54 mm B: 12.00 mm C: 3.00 mm

MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : AC 1000V RMS



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H-D175120030-1X17EE-LF
SERIES
DIP 180°
CONTACT 12.0mm
TOTAL LENGTH 17.54mm
LEADFREE
EMPTY EVEN PIN

DESCRIPTION: