
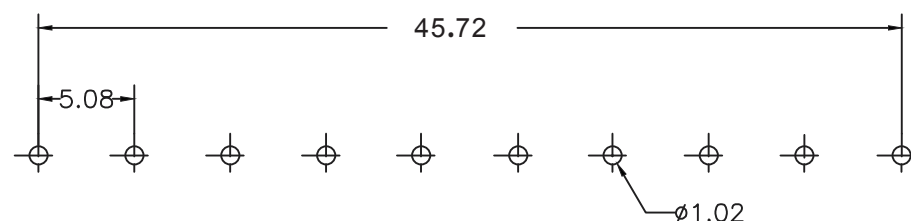



MATERIAL  
**HOUSING : THERMOPLASTIC UL94V-0**  
**CONTACT : COPPER ALLOYS**

SPECIFICATION

**CURRENT: 3A**  
**OPERATING TEMPERATURE: -55° C TO +105℃**  
**CONTACT RESISTANCE : 20 MILLIOHMS MAX**  
**INSULATION RESISTANCE : 1000 MEGAOHMS MIN**  
**WITHSTANDING VOLTAGE : AC 1000V RMS**

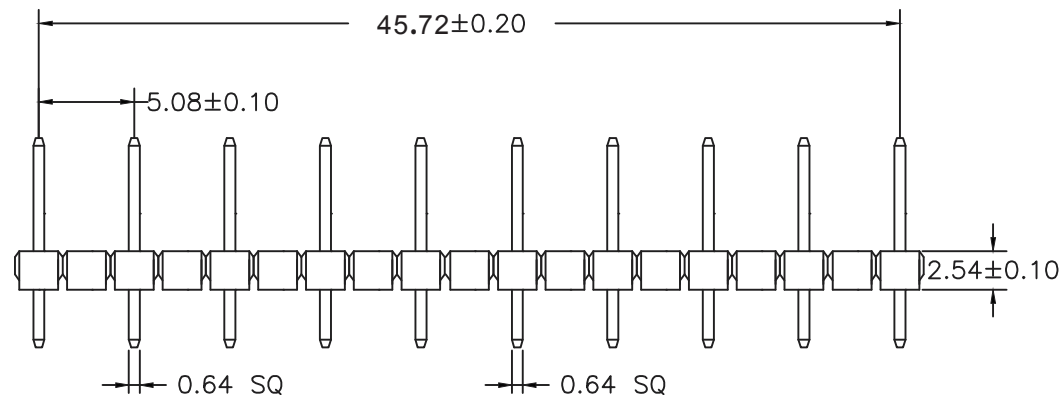

RECOMMENDED P.C.B LAYOUT

A: 17.54 mm B: 12.00 mm C: 3.00 mm

H-D17512030-1X19EE-LF  
LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. H-D17512030-1X19EE

DWG NO. H-D17512030-1X19EE

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司