

MATERIAL

Contact Pin : Brass





SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

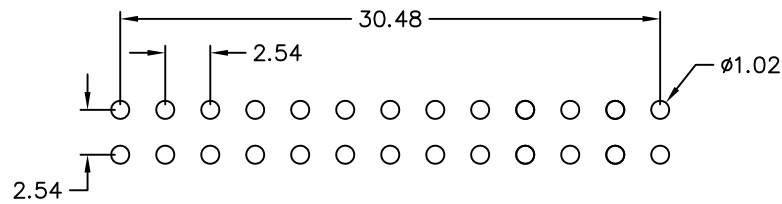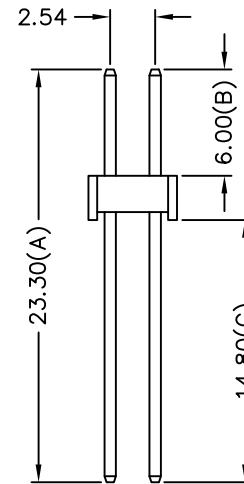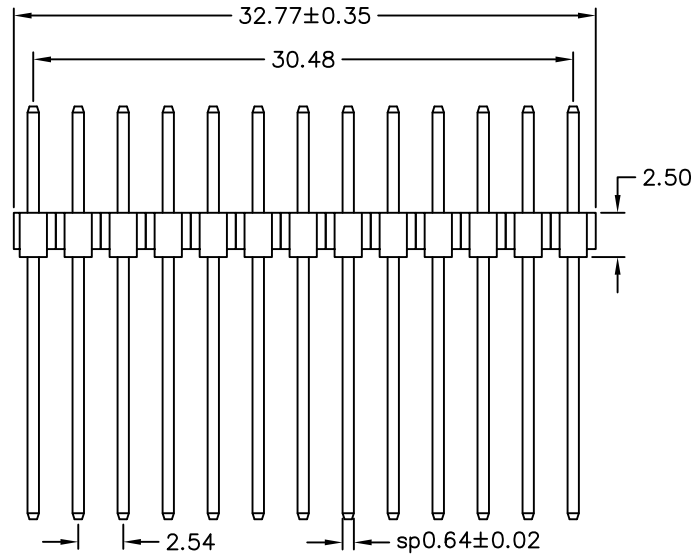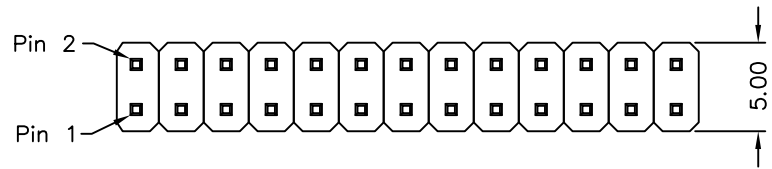

Recommended P.C.B Layout

H-D23360148-2X13-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. H-D23360148-2X13

DWG NO. H-D23360148-2X13

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X. ±
.X ±.30
.XX ±.20
.XXX ±
ANG

DESCRIPTION:

PIN HEADER 2.54*2.54mm
STRAIGHT TYPE, DUAL ROWS

AREA

REVISIONS

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

