



MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

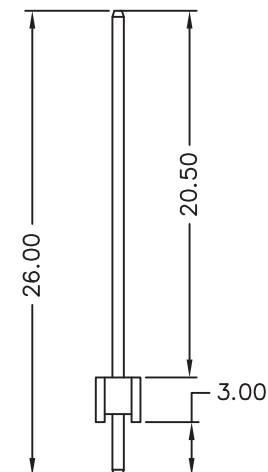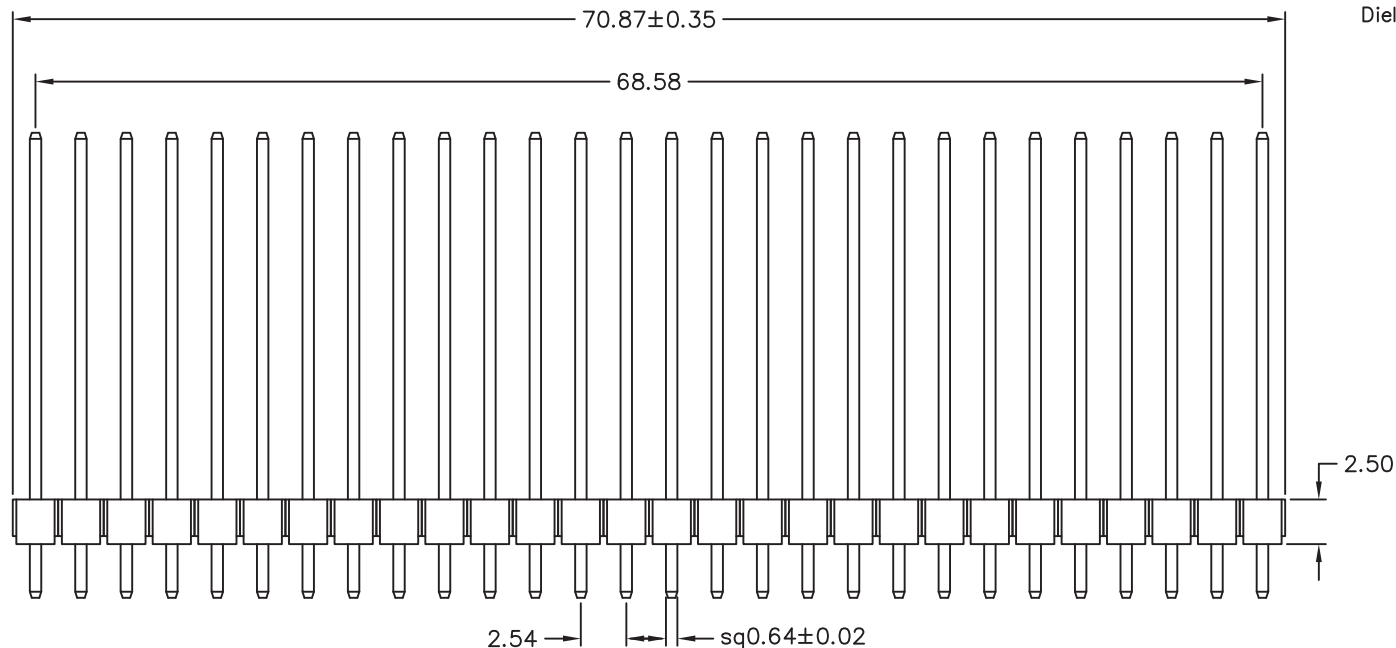

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

照片框

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

ORDER INFORMATION

H-D260205030-1X28-LF

SERIES

LEADFREE

28 WAY

DIP 3.0mm

CONTACT 20.5mm

TOTAL 26.0mm

DIP 180°

DESCRIPTION: