
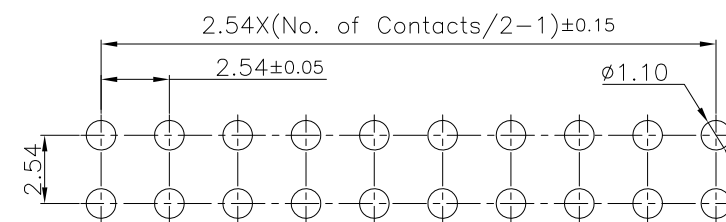
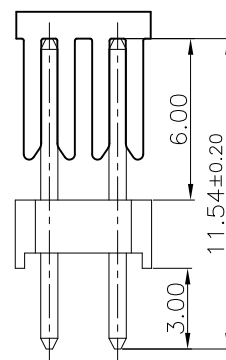


Specifications:
 Current rating:3A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm Max
 Insulation Resistance:1000M Ohm Min
 Withstanding Voltage:600V AC/Minute
 Operating Temperature Range:-40°C To +105°C

Materials and Finish:
 Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Standard Color:Ivory or Black
 Terminal:Copper Alloy
 Plating:Gold
 Packing:250Pcs/Reel

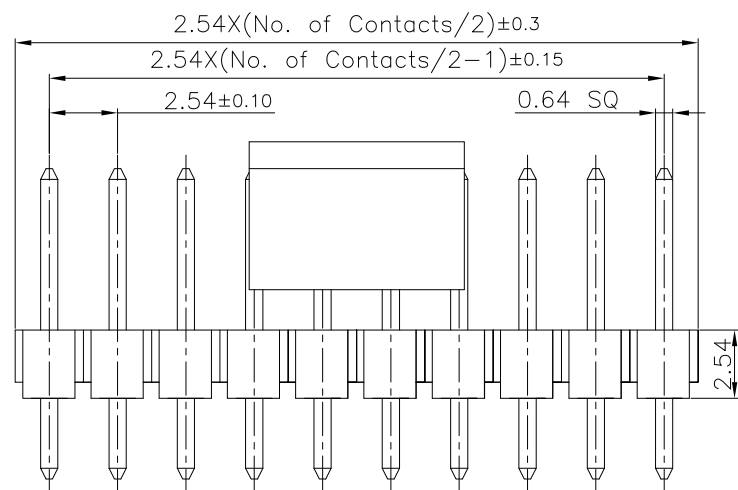

PCB Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

H-DC-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 CAP
 DIP 180°

DESCRIPTION: 2.54mm Pin Header Double Row Straight Type