
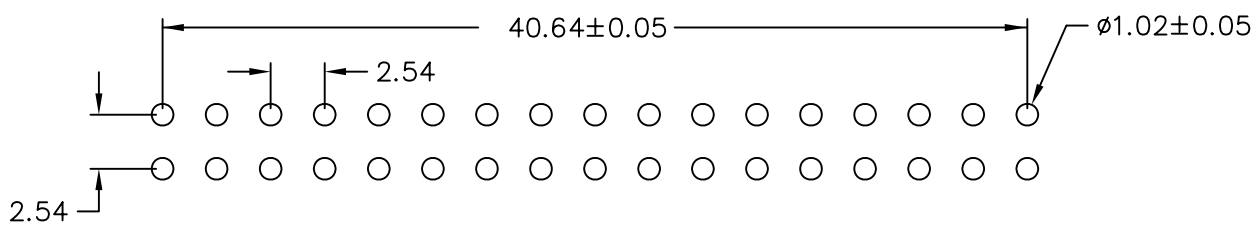

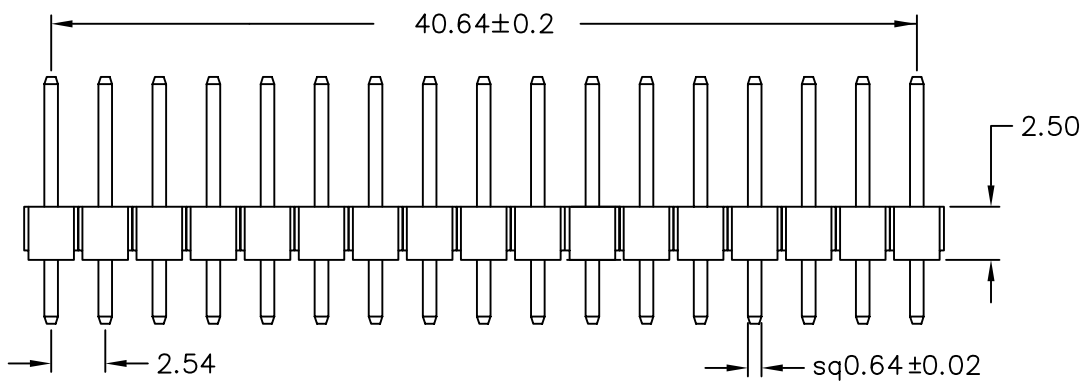


**MATERIAL**

Insulator : 30% Glass fiber PBT  
 Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -55°C to + 120°C

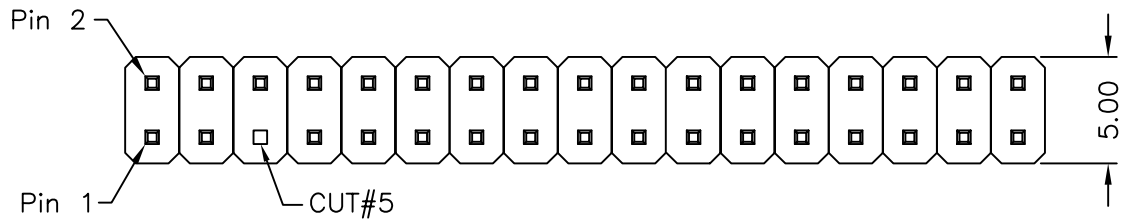

Recommended P.C.B Layout

H-DE5-2X17-LF  
 LEADFREE

RoHS Compliant



PART NO. H-DE5-2X17

DWG NO. H-DE5-2X17

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE  
 .X ± 0.3  
 .XX ± 0.2  
 .XXX  
 AWG

DESCRIPTION:  
 AREA

PIN HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS		REVISIONS	HK	DATE
--	--	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION