


Recommended P.C.B Layout

MATERIAL

Insulator : NY6T UL94-V0   
 Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

PJECTION 

照片框

ORDER INFORMATION

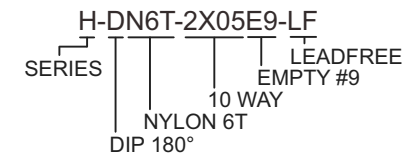

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT TYPE, DUAL ROWS