

Recommended P.C.B Layout

**MATERIAL**

Insulator: NY6T UL94-V0  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 8 AMP PER PIN(20AWG)  
Insulation Resistance : 5000M $\Omega$ Min. at DC 500V  
Contact Resistance : 20m $\Omega$ Max. at DC 100mA  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PJECTION

X. ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

照片框

**ORDER INFORMATION**

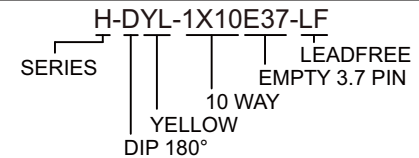

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT TYPE, SINGLE ROW

煜倫股份有限公司

www.morethanall.com