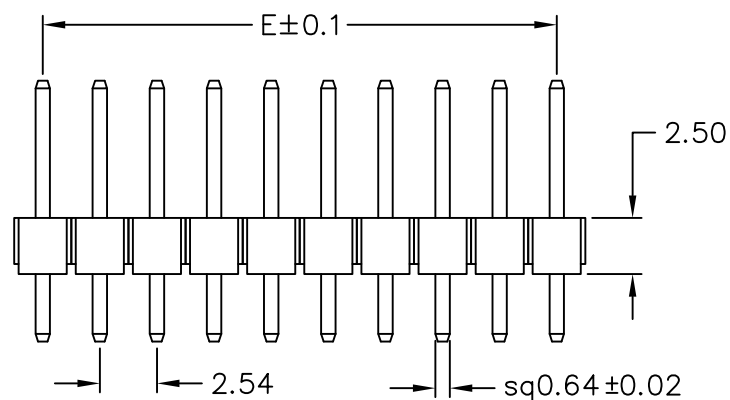
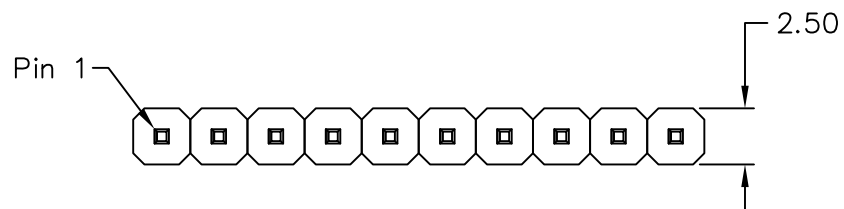


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass, Gold Flash

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		18	43.18
2	2.54	19	45.72
3	5.08	20	48.26
4	7.62	21	50.80
5	10.16	22	53.34
6	12.70	23	55.88
7	15.24	24	58.42
8	17.78	25	60.96
9	20.32	26	63.50
10	22.86	27	66.04
11	25.40	28	68.58
12	27.94	29	71.12
13	30.48	30	73.66
14	33.02	31	76.20
15	35.56	32	78.74
16	38.10	33	81.28
17	40.64		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±0.30
.XX±0.20
.XXX±
ANG±

照片框

ORDER INFORMATION

H-DxxxxyyyzzzSxx-1Xxx-LF

SERIES
DIP 180°
TOTAL
113:11.3mm
CONTACT
058:5.8mm
130:13.0mm
DIP
030:3.0mm
102:10.2mm
LEADFREE
1X02:02 WAY
1X33:33 WAY
S01:SEMI GOLD 1u"
S30:SEMI GOLD 30u"

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW