

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass





SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature : -55°C to +105°C

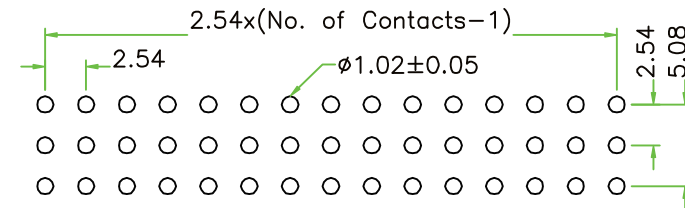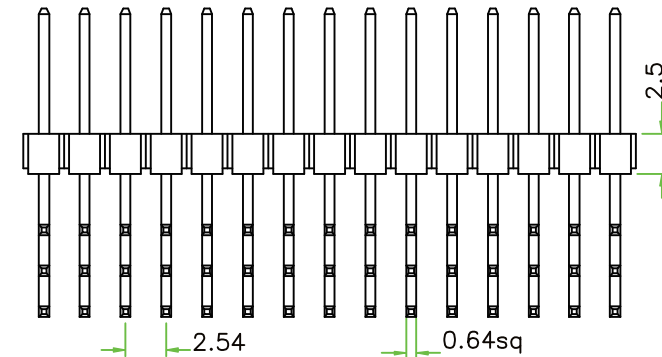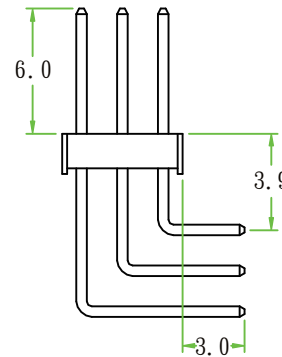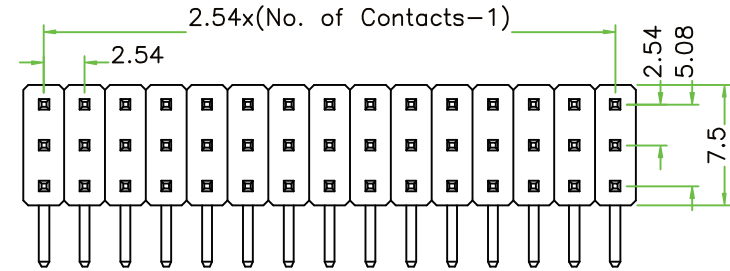

Recommended P.C.B. Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

H-R-3Xxx-LF

SERIES

DIP 90°

3X02:06WAY

3X40:120WAY

LEADFREE

DESCRIPTION: 2.54MM PIN HEADER RIGHT ANGLE TYPE