

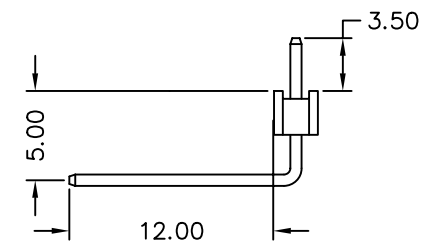


MATERIAL
 Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

SPECIFICATION
 Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

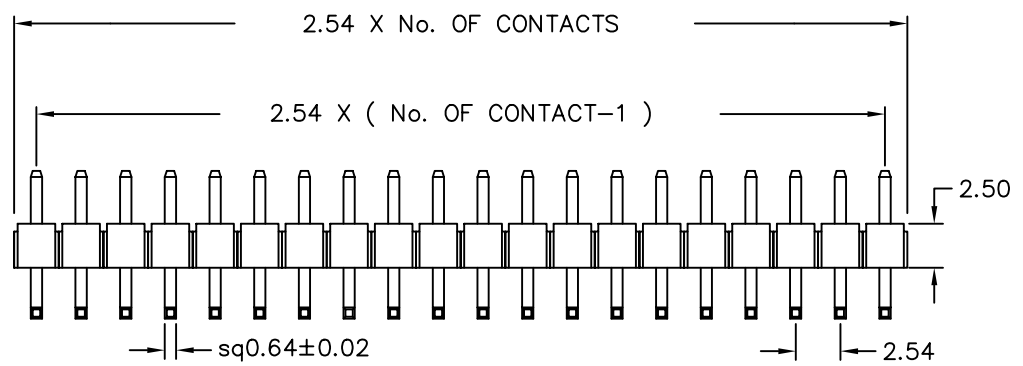

Recommended P.C.B Layout

H-R1205035-1Xxx-LF
 LEADFREE

RoHS Compliant



PART NO. H-R1205035-1Xxx

DWG NO. H-R1205035-1Xxx

APPROVED BY CY

FILE NO.

DRAWING BY

TOLERANCES ARE
 .X ± 0.3
 .XX ± 0.2
 .XXX
 AWG

DESCRIPTION: PIN HEADER 2.54*2.54mm
 RIGHT ANGLE TYPE, SINGLE ROW
 OPPOSITE INSULATOR

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------