
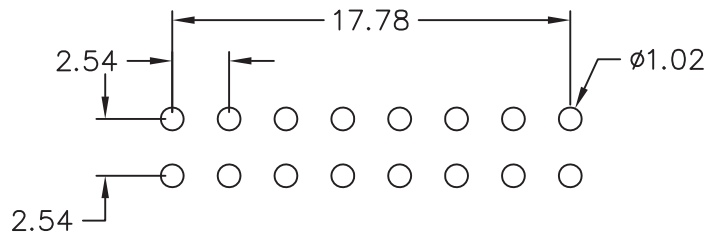
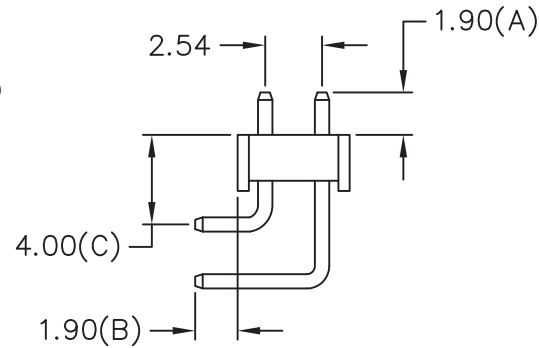


MATERIAL
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

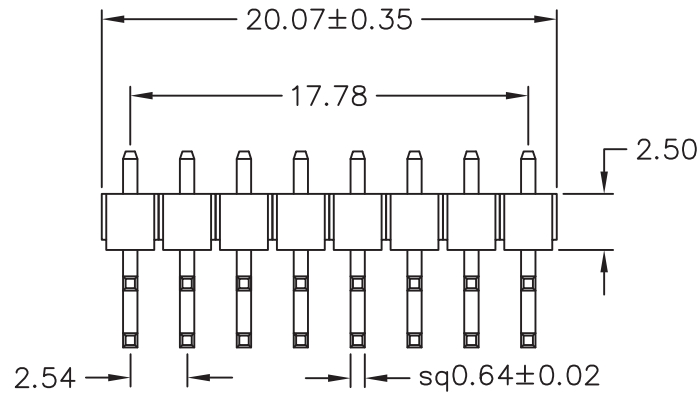

Recommended P.C.B Layout

H-R1919-2X08-LF
LEADFREE
RoHS Compliant



PART NO. H-R1919-2X08		CHECKED BY CY	TOLERANCES ARE X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG	DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS
DWG NO. H-R1919-2X08				
FILE NO.		PROJECTION	AREA	REVISIONS
UNIT / mm	SCALE 1:1			DATE

焯倫股份有限公司