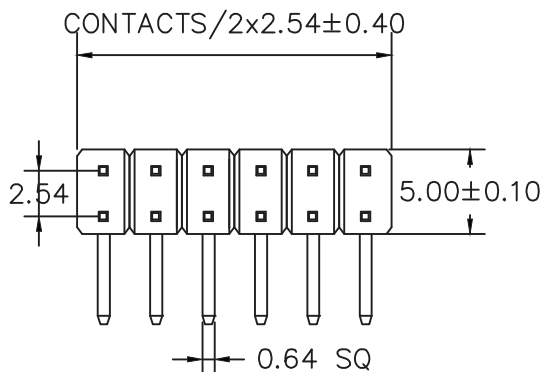


RECOMMENDED P.C.B LAYOUT

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION



CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

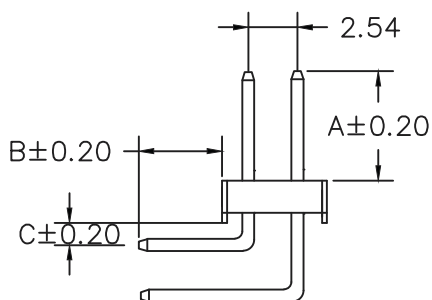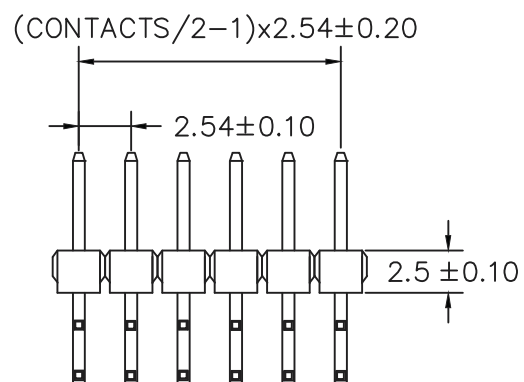

A: 3.30 mm B: 3.00 mm C: 4.20 mm

H-R25423330-2Xxx-LF

2X02:04WAY

LEADFREE

2X40:80WAY

RoHS Compliant

CONTACTS	
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. H-R25423330-2Xxx

DWG NO. H-R25423330-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±

.X ± 0.38

.XX ± 0.25

.XXX ±

ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司