

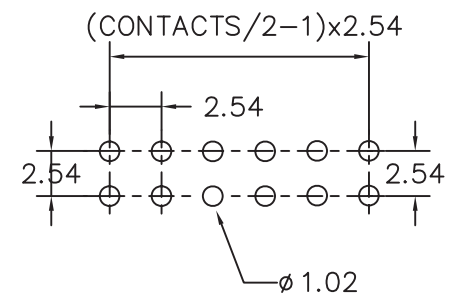
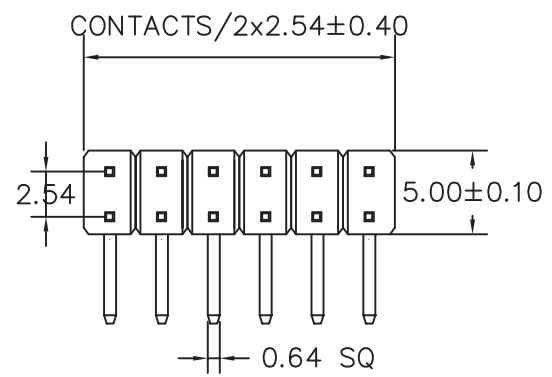


|          |      |
|----------|------|
| CONTACTS | 2X21 |
| 2X2      | 2X22 |
| 2X3      | 2X23 |
| 2X4      | 2X24 |
| 2X5      | 2X25 |
| 2X6      | 2X26 |
| 2X7      | 2X27 |
| 2X8      | 2X28 |
| 2X9      | 2X29 |
| 2X10     | 2X30 |
| 2X11     | 2X31 |
| 2X12     | 2X32 |
| 2X13     | 2X33 |
| 2X14     | 2X34 |
| 2X15     | 2X35 |
| 2X16     | 2X36 |
| 2X17     | 2X37 |
| 2X18     | 2X38 |
| 2X19     | 2X39 |
| 2X20     | 2X40 |

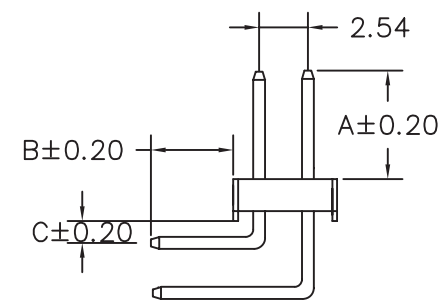

RECOMMENDED P.C.B LAYOUT

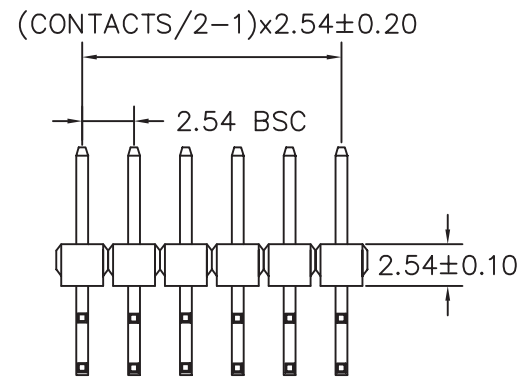

A: 3.00 mm B: 6.10 mm C: 0.61 mm

H-R303161-2Xxx-LF  
LEADFREE  
2X02~2X40WAY  
(04)~(80)

RoHS Compliant

MATERIAL  
HOUSING : THERMOPLASTIC UL94V-0  
CONTACT : COPPER ALLOYS

SPECIFICATION  
CURRENT: 3A  
OPERATING TEMPERATURE: -55°C TO +105°C  
CONTACT RESISTANCE : 20 MILLIOHMS MAX  
INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
WITHSTANDING VOLTAGE : AC 1000V RMS



PART NO. H-R303161-2Xxx

DWG NO. H-R303161-2Xxx

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE