

MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass





SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

H-R304629-2Xxx-LF
 LEADFREE

RoHS Compliant

POLES	DIM E	POLES	DIM E
		21	50.80
2	2.54	22	53.34
3	5.08	23	55.88
4	7.62	24	58.42
5	10.16	25	60.96
6	12.70	26	63.50
7	15.24	27	66.04
8	17.78	28	68.58
9	20.32	29	71.12
10	22.86	30	73.66
11	25.40	31	76.20
12	27.94	32	78.74
13	30.48	33	81.28
14	33.02	34	83.82
15	35.56	35	86.36
16	38.10	36	88.90
17	40.64	37	91.44
18	43.18	38	93.98
19	45.72	39	96.52
20	48.26	40	99.06

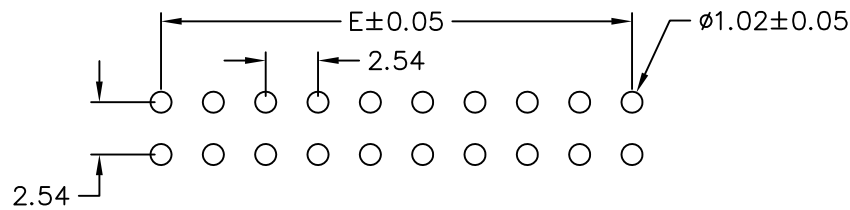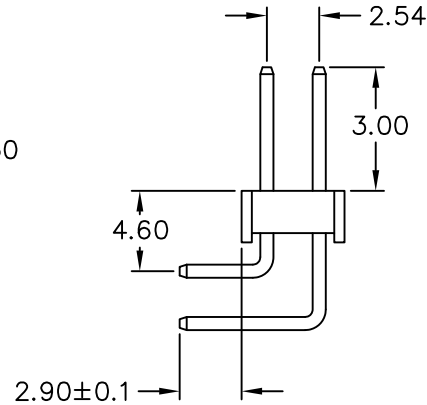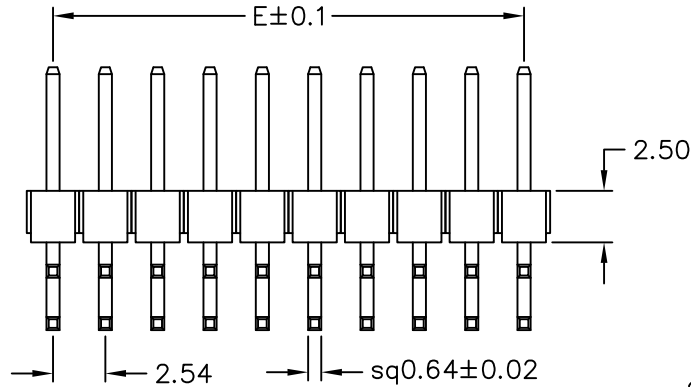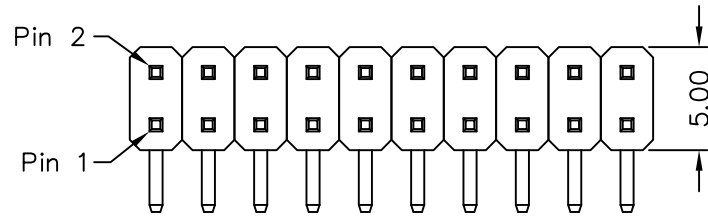

Recommended P.C.B Layout



PART NO. H-R304629-2Xxx

DWG NO. H-R304629-2Xxx

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE
 .X ± 0.3
 .XX ± 0.2
 .XXX
 AWG

DESCRIPTION:
 AREA

PIN HEADER 2.54*2.54mm
 RIGHT ANGLE TYPE, DUAL ROWS
 REVISIONS
 HK
 DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION