



RECOMMENDED P.C.B LAYOUT

MATERIAL  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

SPECIFICATION  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 1000V RMS

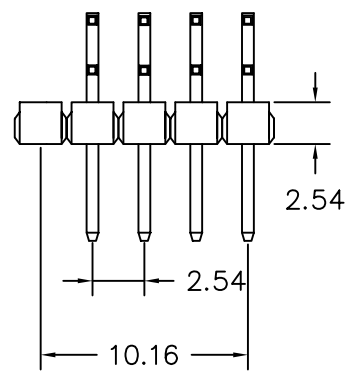

A: 3.60 mm B: 6.40 mm C: 2.00 mm

H-R364564-2X05E1P-LF  
 LEADFREE

RoHS Compliant



PART NO. H-R364564-2X05E1P

DWG NO. H-R364564-2X05E1P

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±

AREA REVISIONS HK DATE

UNIT / mm

SCALE 1:1

PROJECTION

AWG

煜倫股份有限公司