


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A



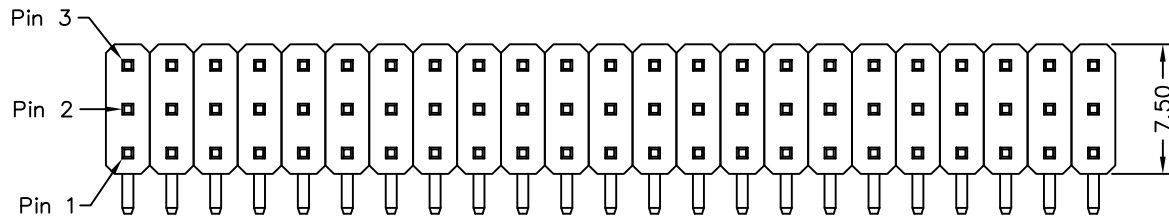


MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

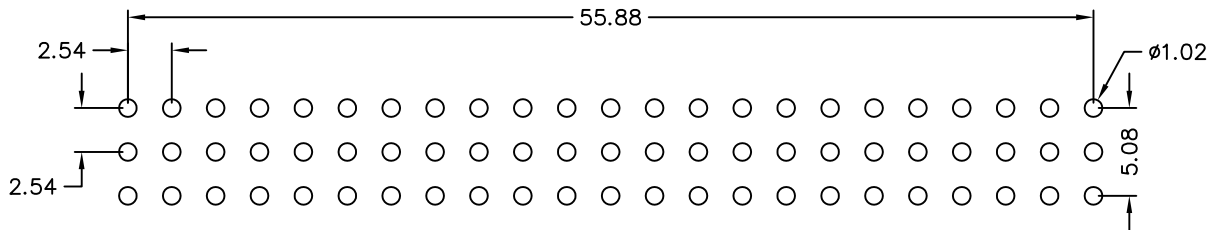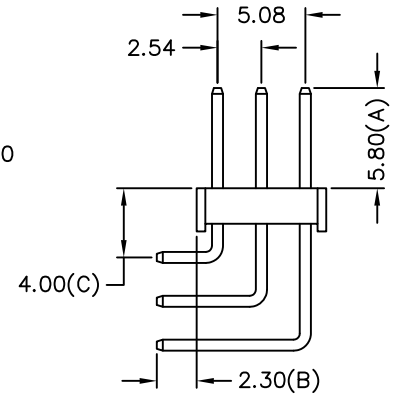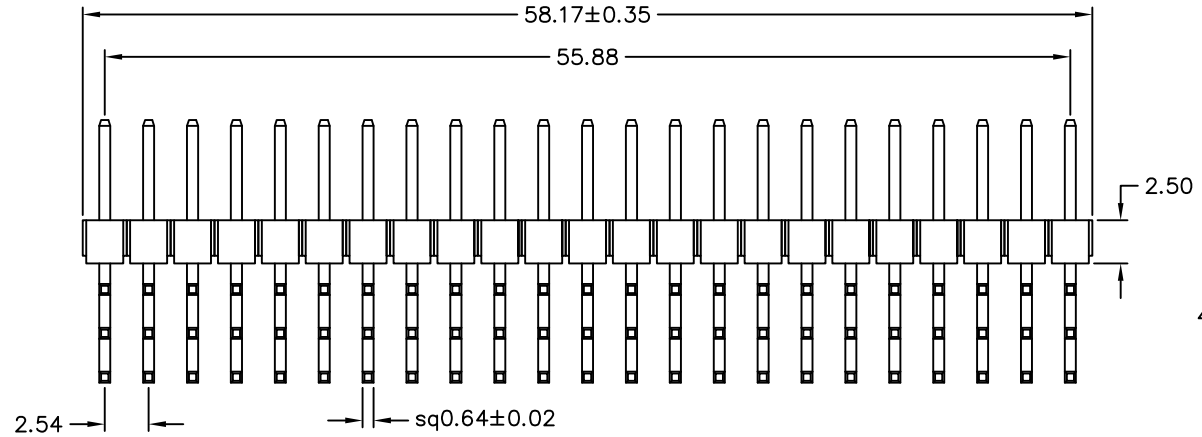

Recommended P.C.B Layout

H-R584023-3X23-LF
 LEADFREE
 RoHS Compliant



| | | | | | |
|-------------------------|-----------|---------------|--|---|------------|
| PART NO. H-R584023-3X23 | | CHECKED BY CY | TOLERANCES ARE X, ± .X ± .30 .XX ± .20 .XXX ± ANG | DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, TRIPLE ROWS | |
| DWG NO. H-R584023-3X23 | | | | | DRAWING BY |
| FILE NO. | | PROJECTION | AREA | REVISIONS | DATE |
| UNIT / mm | SCALE 1:1 | | | | |

煜倫股份有限公司