

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F

E

D


C

B



A

SPECIFICATIONS:

Material:
 Insulator: PBT , glass rated UL 94V-0
 Insulator color : Black
 Contacts : Brass
 Plating:
 Plating :Gold Flash over Nickel underplate overall
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperatures: -55 to +105
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 200° for 5~10 seconds

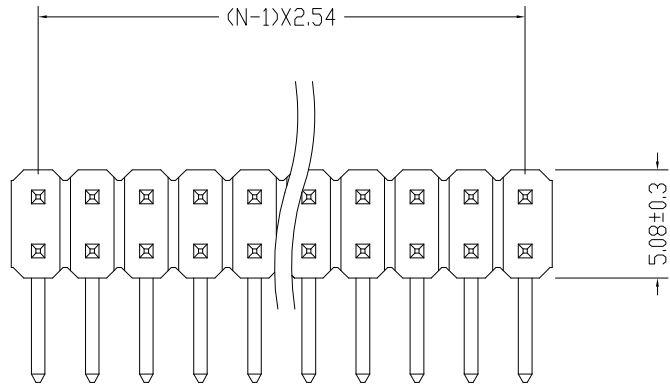

H-R6249-2Xxx-LF
 LEADFREE
 RoHS Compliant

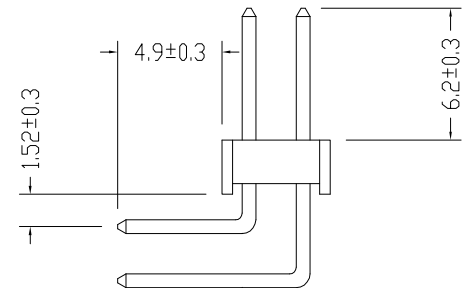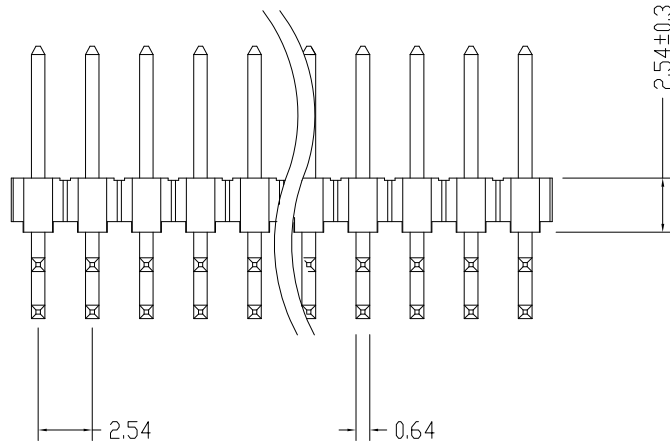

MORETHANALL
 CONNECTORS
 ASSEMBLIES

| | | | | | | | | |
|-----------------------|-----------|---------------|--|--|---------------|----|------|--|
| PART NO. H-R6249-2Xxx | | CHECKED BY CY | | TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG | DESCRIP TION: | | | |
| DWG NO. H-R6249-2Xxx | | DRAWING BY | | | | | | |
| FILE NO. | | PROJECTION | | AREA | REVISIONS | HK | DATE | |
| UNIT / mm | SCALE 1:1 | | | | | | | |

煜倫股份有限公司